ROSS®

FACTOCOMPONENTS
INDUSTRIAL SUPPLIES AND MANUFACTURING EQUIPMENT

Directional Control Inline Poppet Valves
27 Series

Product Catalog

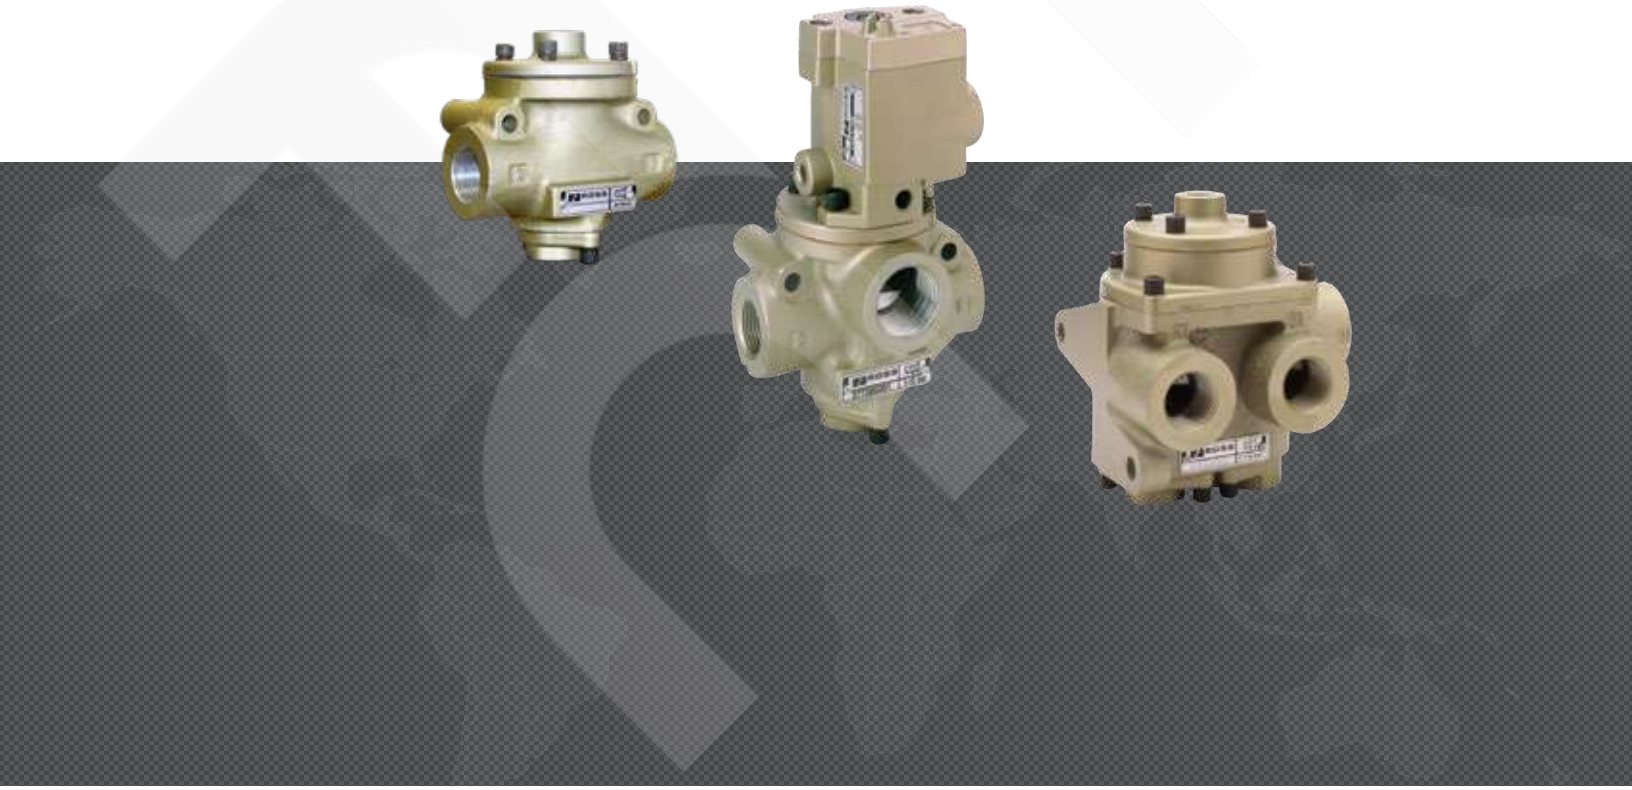

บริษัท แฟ็คโต คอมโพเนนส์ จำกัด | FACTO COMPONENTS CO., LTD.

845/3-4 ชั้น 3 ถ.เทพารักษ์ ต.เทพารักษ์ อ.เมือง จ.สมุทรปราการ 10270

TEL. 02-384-6060, 086-369-5871 | LINE OA: @factocomps | Website : www.factocomponents.co.th | Email : info@factocomponents.co.th

Inline Poppet Valves 27 Series
Product Overview

Directional Control Function

Directional control valves function is to control the direction of flow in the pneumatic circuit. Directional control valves are able to control the way the air passes. These valves can regulate the airflow being capable to stop fluid flow, allow fluid flow, and change the direction of fluid flow. These three functions usually operate in combination.

Solenoid Pilot Controlled	Direct Double Solenoid Pilot Controlled	Pressure Controlled

Illustration examples.

VALVE FEATURES

Poppet Design	Poppet construction for high dirt tolerance
Mounting Options	Can be mounted close to actuator, reducing length of pipe to be pressurized/exhausted on each cycle
Pilot Supply	Internal or external
High Velocity	Near zero leakage
Positive Sealing	No sliding action to prevent damage and wear
Reliability	Consistent response times over the life of the valve

Explosion-Proof solenoid pilot valves available, see valves for Hazardous Locations.

FM APPROVED

Actuation	Available Inlet Port Sizes									Functions			Maximum Flow C_v (Nl/min)	Page
	1/4	3/8	1/2	3/4	1	1-1/4	1-1/2	2	2-1/2	2/2	3/2	4/2		
Solenoid Pilot Controlled	●	●	●	●	●	●	●	●	●	●	●		71 (70000)	3 – 9
Direct Double Solenoid Controlled	●	●	●	●	●	●	●					●	34 (33000)	10 – 13
Pressure Controlled	●	●	●	●	●	●	●			●	●	●	71 (70000)	14 – 19
Accessories														20 – 21

Specifications

STANDARD SPECIFICATIONS

GENERAL	Function		2/2 Valve	Normally Closed, Normally Open	
			3/2 Valve	Normally Closed, Normally Open	
			4/2 Valve		
	Construction Design		Poppet		
	Actuation		Electrical	Solenoid Pilot Controlled	
				Direct Double Solenoid Pilot Controlled	
			Pneumatic	Pressure Controlled	
	Mounting	Type	Inline		
		Orientation	Any, preferably vertical		
	Connection		Threaded Port	NPT	
				G	
	Manual Override (Solenoid Controlled valves)		Flush; rubber, non-locking		
OPERATING CONDITIONS	Temperature	Solenoid Pilot Controlled	Ambient	40° to 120°F (4° to 50°C)	
			Media	40° to 175°F (4° to 80°C)	
		Pressure Controlled	Ambient	40° to 175°F (4° to 80°C)	
			Media		
	Flow Media		Filtered air		
	Operating Pressure		Body Size	3/8 through 1-1/4	15 to 150 psig (1 to 10 bar)
				2	30 to 150 psig (2 to 10 bar)
	Pilot Supply Pressure		Internal	Must meet minimum operating pressure	
			External	Must be equal to or greater than inlet pressure	

ELECTRICAL DATA FOR SOLENOID PILOT VALVES	Solenoids	Current Flow	Operating Voltage	Power Consumption (each solenoid)
		DC	24 volts	14 watts
		AC	110-120 volts, 50/60 Hz	87 VA inrush, 30 VA holding
			230-240 volts, 60 Hz	
		Rated for continuous duty		

CONSTRUCTION MATERIAL	Valve Body	Cast Aluminum
	Poppet	Acetal and Stainless Steel
	Seals	Buna-N
SAFETY DATA	Safety Integrity Level (SIL)	Certified by TÜV Rheinland in accordance to IEC 61508 and IEC 61511 safety integrity level 2 (SIL 2) and EN ISO 13849-1, PL c (with application specific diagnosis) in singular application with HFT = 0 and SIL 3 and PL e in redundant application with HFT≥1, for details see certificate.

IMPORTANT NOTE: Please read carefully and thoroughly all of the CAUTIONS, WARNINGS on the inside back cover.

PRODUCT CREDENTIALS

Safety Integrity Level	Declaration of Conformity		Certificate of Compliance
Per IEC 2061:2001			
SIL 2 Functional Safety	CE	EAC	C SP US

Ordering Information

2/2 Solenoid Pilot Controlled Valves

MODEL NUMBER CONFIGURATOR — 2-Way 2-Position Valves

	27	7	1	B	2001	W

Port Thread	
NPT Leave Blank	
G	D

Series

Actuation
Solenoid Pilot

Valve Function	
2/2 Normally Closed	1
2/2 Normally Open	2

Revision Level

Body Size	Port Size In-Out	Internal Pilot Supply	External Pilot Supply
3/8	1/4	2001	2051
	3/8	3001	3051
	1/2	4011	4061
3/4	1/2	4001	4051
	3/4	5001	5051
	1	6011	6061
1-1/4	1	6001	6051
	1-1/4	7001	7051
	1-1/2	8011	8061
2	1-1/2	8001	8051
	2	9001	9051
	2-1/2	9011	9061

Current	Voltage*	
DC	24 V	W
AC	110-120 V, 50/60 Hz	Z
	230-250 V, 60 Hz	Y

* For other voltages consult ROSS.

Model Number examples: 2771B2001W, D2771B9061Z.

Size		Flow C_v (Nl/min)		Average Response Constants *			≈ Weight lb (kg)
Body	Port 1, 2	Normally Closed (NC)	Normally Open (NO)	M	F		
		1-2	1-2		NC	NO	
3/8	1/4	1.8 (1800)	1.8 (1800)	10	0.91	0.91	2.5 (1.2)
	3/8	3.2 (3100)	2.9 (2800)	10	0.70	0.76	
	1/2	3.9 (3800)	3.4 (3300)	10	0.64	0.72	
3/4	1/2	7.2 (7100)	6.5 (6400)	14	0.37	0.43	3.3 (1.5)
	3/4	9.1 (9000)	8.2 (8100)	14	0.34	0.39	
	1	9.9 (9700)	8.2 (8100)	14	0.34	0.37	
1-1/4	1	21 (21000)	21 (21000)	26	0.17	0.17	7.0 (3.2)
	1-1/4	30 (31000)	22 (22000)	26	0.15	0.19	
	1-1/2	32 (31000)	24 (24000)	26	0.15	0.18	
2	1-1/2	46 (45000)	46 (45000)	41	0.09	0.09	15.5 (6.9)
	2	59 (58000)	58 (57000)	41	0.07	0.07	
	2-1/2	66 (65000)	60 (59000)	41	0.07	0.06	

* **Valve Response Time** – Response Time (msec) = M + (F • V). This is the average time required to fill a volume V (cubic inches) to 90% of supply pressure or to exhaust it to 10% of supply pressure. M and F values are shown above.

Valve Schematic

Normally Closed



Normally Open



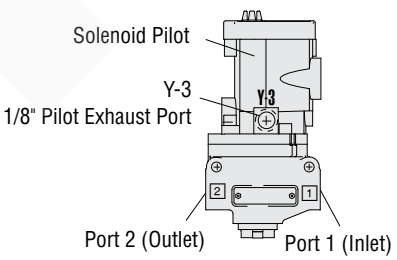

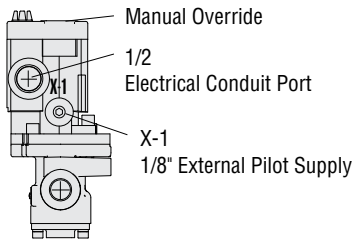

2/2 Solenoid Pilot Controlled Valves

DIMENSIONS	Inches (mm)

Body Size 3/8

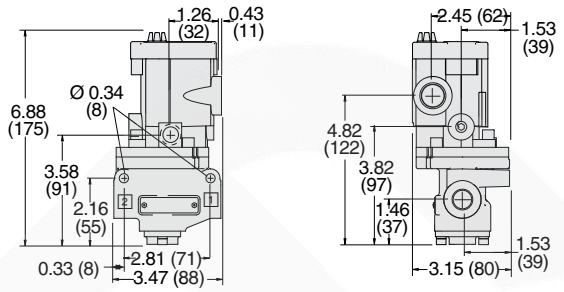

Body Size 3/4

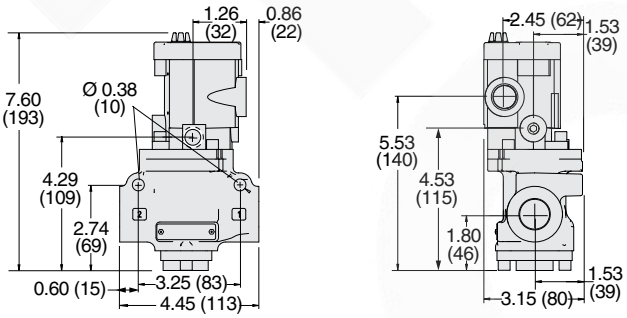

Body Size 1-1/4

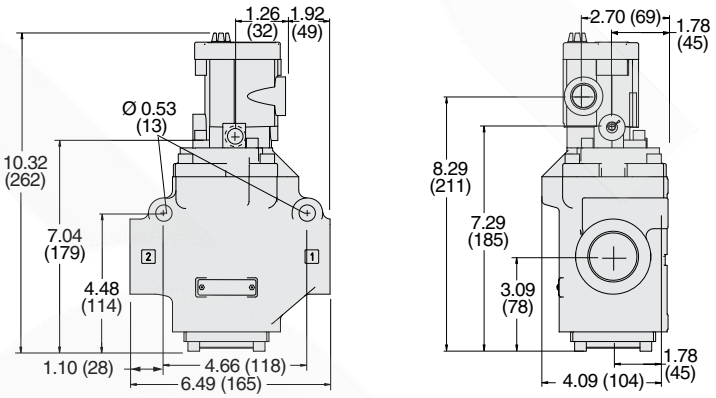

Body Size 2

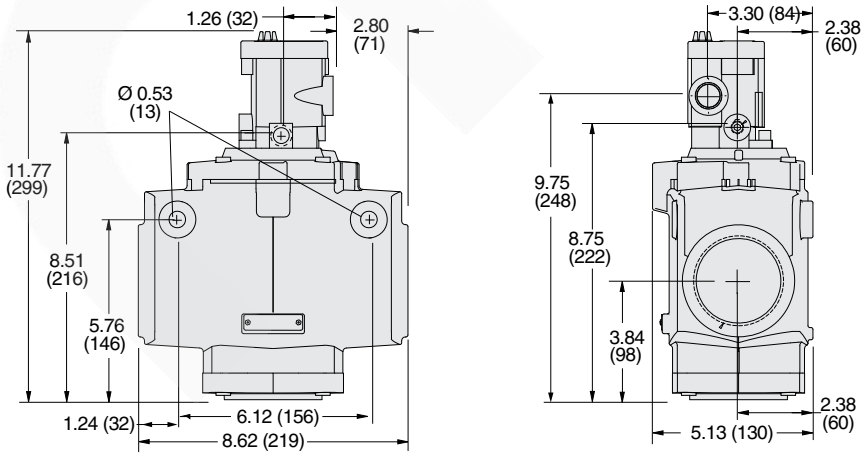

Downloadable CAD models available.

Ordering Information

3/2 Solenoid Pilot Controlled Valves

MODEL NUMBER CONFIGURATOR — 3-Way 2-Position Valves

	27	7	3	B	2001	W

Port Thread

NPT Leave Blank	
G	D

Series

Actuation

Solenoid Pilot

Valve Function

3/2 Normally Closed	3
3/2 Normally Open	4

Revision Level

Body Size	Port Size In-Out	Port Size Exhaust	Internal Pilot Supply	External Pilot Supply
3/8	1/4	1/2	2001	2051
	3/8	1/2	3001	3051
	1/2	1/2	4011	4061
3/4	1/2	1	4001	4051
	3/4	1	5001	5051
	1	1	6011	6061
1-1/4	1	1-1/2	6001	6051
	1-1/4	1-1/2	7001	7051
	1-1/2	1-1/2	8011	8061
2	1-1/2	2-1/2	8001	8051
	2	2-1/2	9001	9051
	2-1/2	2-1/2	9011	9061

Current	Voltage*	
DC	24 V	W
AC	110-120 V, 50/60 Hz	Z
	230-250 V, 60 Hz	Y

* For other voltages consult ROSS.

Model Number examples: 2773B2001W, D2773B6061Z.

Size			Flow C_V (Nl/min)				Average Response Constants *					≈ Weight lb (kg)
Body	Port 1, 2	Port 3	Normally Closed (NC)		Normally Open (NO)		M	F				
								NC		NO		
			1-2	2-3	1-2	2-3		1-2	2-3	1-2	2-3	
3/8	1/4	1/2	1.9 (1900)	3.3 (3200)	1.7 (1700)	3.0 (3000)	10	0.90	0.80	0.99	0.88	2.5 (1.2)
	3/8	1/2	2.9 (2800)	4.4 (4300)	2.8 (2800)	3.0 (3000)	10	0.70	0.50	0.90	0.77	
	1/2	1/2	3.8 (3800)	5.0 (4900)	3.0 (3000)	3.0 (3000)	10	0.75	0.50	0.90	0.76	
3/4	1/2	1	6.2 (6100)	9.4 (9300)	6.1 (6000)	8.0 (7900)	11	0.43	0.27	0.46	0.60	3.3 (1.5)
	3/4	1	8.2 (8100)	10 (9800)	7.7 (7600)	8.0 (7900)	11	0.36	0.26	0.45	0.60	
	1	1	9.1 (9000)	12 (12000)	8.3 (8200)	8.0 (7900)	11	0.34	0.25	0.40	0.59	
1-1/4	1	1-1/2	21 (21000)	27 (27000)	18 (18000)	20 (20000)	28	0.17	0.14	0.20	0.17	7.0 (3.2)
	1-1/4	1-1/2	29 (29000)	29 (29000)	21 (21000)	22 (22000)	28	0.15	0.15	0.19	0.17	
	1-1/2	1-1/2	30 (30000)	30 (30000)	21 (21000)	25 (25000)	28	0.15	0.15	0.19	0.16	
2	1-1/2	2-1/2	45 (44000)	75 (74000)	45 (44000)	53 (52000)	76	0.05	0.04	0.07	0.04	16.5 (7.4)
	2	2-1/2	57 (56000)	78 (77000)	55 (54000)	61 (60000)	76	0.05	0.04	0.05	0.04	
	2-1/2	2-1/2	66 (65000)	82 (81000)	61 (60000)	71 (70000)	76	0.05	0.04	0.50	0.04	

* **Valve Response Time** – Response Time (msec) = M + (F • V). This is the average time required to fill a volume V (cubic inches) to 90% of supply pressure or to exhaust it to 10% of supply pressure. M and F values are shown above.

Valve Schematic

Normally Closed



Normally Open



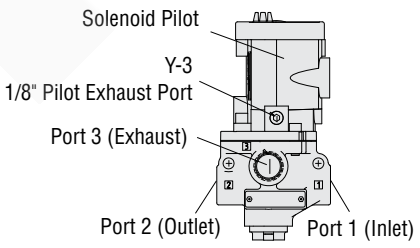



Manual Override

1/2" Electrical Conduit Port

X-1
1/8" External Pilot Supply Port

3/2 Solenoid Pilot Controlled Valves

DIMENSIONS	Inches (mm)

Body Size 3/8

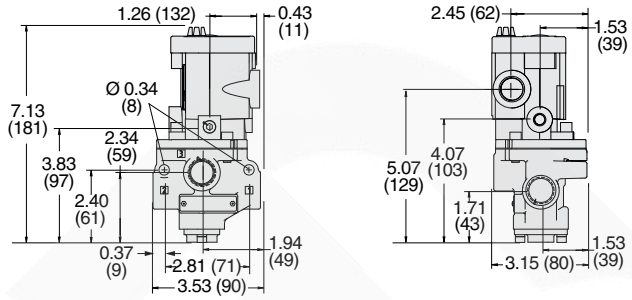

Body Size 3/4

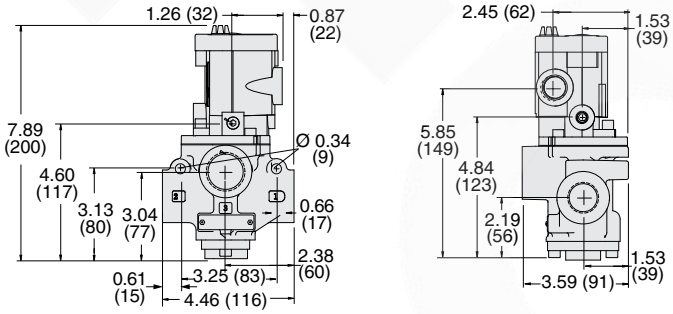

Body Size 1-1/4

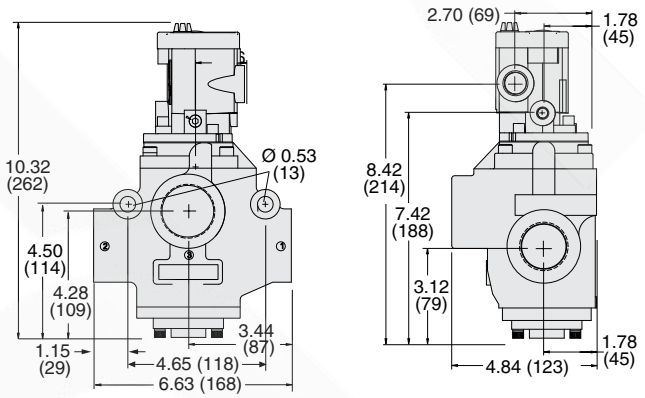

Body Size 2

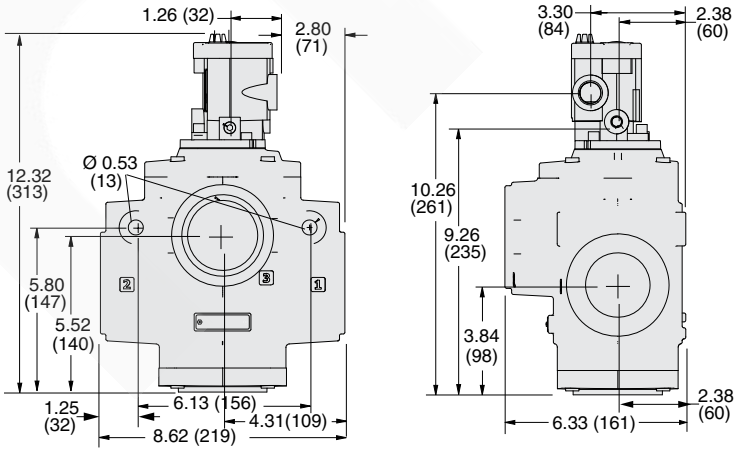

Downloadable CAD models available.

Ordering Information

4/2 Solenoid Pilot Controlled Valves

MODEL NUMBER CONFIGURATOR — 4-Way 2-Position Valves

	27	7	6	B	2001	W

Port Thread	
NPT Leave Blank	
G	D

Series

Actuation
Solenoid Pilot

Valve Function
4/2

Revision Level

Current	Voltage*	
DC	24 V	W
AC	110-120 V, 50/60 Hz	Z
	230-250 V, 60 Hz	Y

* For other voltages consult ROSS.

Body Size	Port Size		Internal Pilot Supply	External Pilot Supply
	In-Out	Exhaust		
3/8	1/4	1/2	2001	2051
	3/8	1/2	3001	3051
	1/2	1/2	4011	4061
3/4	1/2	1	4001	4051
	3/4	1	5001	5051
	1	1	6011	6061
1-1/4	1	1-1/2	6001	6051
	1-1/4	1-1/2	7001	7051
	1-1/2	1-1/2	8011	8061

Model Number examples: 2776B2001W, D2776B92051Z.

Size			Flow C_V (Nl/min)				Average Response Constants *			≈ Weight lb (kg)
Body	Port 1, 2, 4	Port 3	1-2	2-3	1-4	4-3	M	F		
								1-2, 1-4	4-3, 2-3	
3/8	1/4	1/2	1.7 (1700)	2.3 (2300)	1.8 (1800)	2.8 (2800)	10	0.92	0.92	3.0 (1.4)
	3/8	1/2	2.6 (2600)	3.3 (3200)	2.9 (2900)	3.9 (3800)	10	0.90	0.90	
	1/2	1/2	3.1 (3100)	4.2 (4100)	4.2 (4100)	5.2 (5100)	10	0.89	0.73	
3/4	1/2	1	5.7 (5600)	7.0 (6900)	5.5 (5400)	7.3 (7200)	26	0.50	0.66	5.3 (2.4)
	3/4	1	7.4 (7300)	7.0 (6900)	7.3 (7200)	9.5 (9300)	26	0.36	0.55	
	1	1	7.9 (7800)	8.0 (7900)	8.0 (7900)	11 (11000)	26	0.35	0.50	
1-1/4	1	1-1/2	13 (13000)	21 (21000)	18 (18000)	22 (22000)	79	0.17	0.22	11.3 (5.1)
	1-1/4	1-1/2	16 (16000)	22 (22000)	25 (25000)	26 (26000)	79	0.16	0.18	
	1-1/2	1-1/2	16 (16000)	22 (22000)	26 (26000)	27 (27000)	79	0.15	0.15	

* **Valve Response Time** – Response Time (msec) = M + (F • V). This is the average time required to fill a volume V (cubic inches) to 90% of supply pressure or to exhaust it to 10% of supply pressure. M and F values are shown above.

Valve Schematic



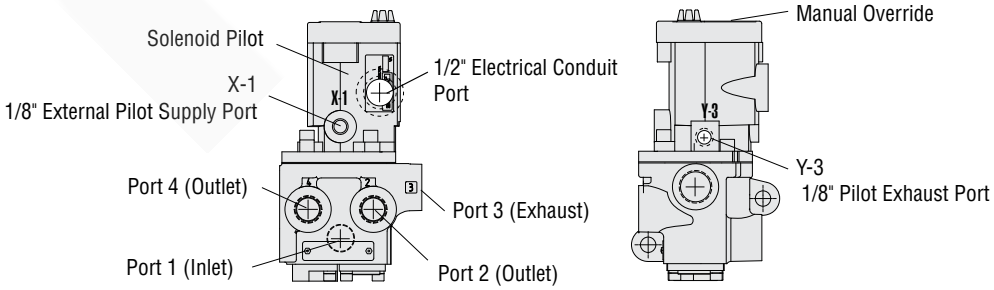

4/2 Solenoid Pilot Controlled Valves

DIMENSIONS	Inches (mm)

Body Size 3/8

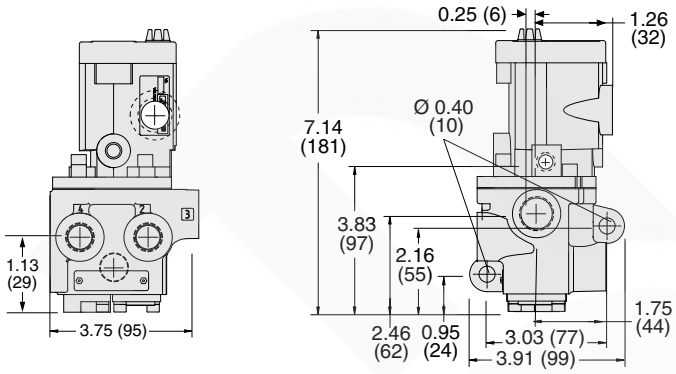

Body Size 3/4

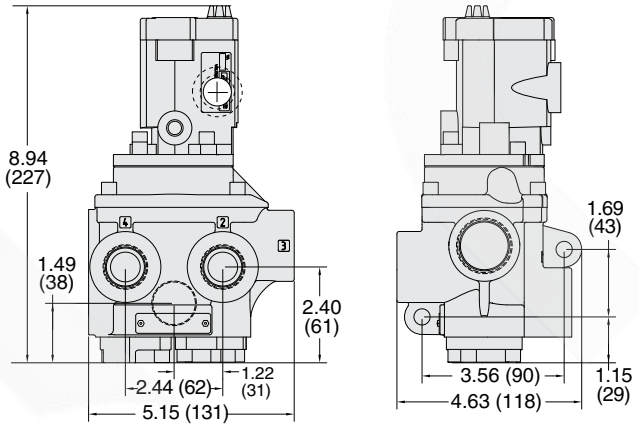

Body Size 1-1/4

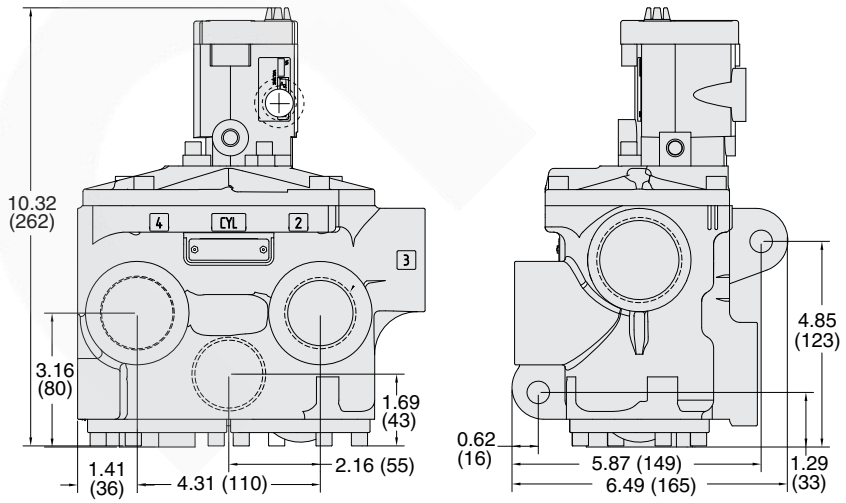

Downloadable CAD models available.

Ordering Information

3/2 Direct Double Solenoid Pilot Controlled Valves

MODEL NUMBER CONFIGURATOR — 3-Way 2-Position Valves

	27	7	3	B	2003	W

Port Thread	
NPT Leave Blank	
G	D

Series

Actuation
Direct Solenoid Controlled

Valve Function	
3/2 Normally Closed	3
3/2 Normally Open	4

Revision Level

Body Size	Port Size		Internal Pilot Supply*
	In-Out	Exhaust	
3/8	1/4	1/2	2003
	3/8	1/2	3003
	1/2	1/2	4013
3/4	1/2	1	4003
	3/4	1	5003
	1	1	6013
1-1/4	1	1-1/2	6003
	1-1/4	1-1/2	7003
	1-1/2	1-1/2	8013

* For models with external pilot supply consult ROSS.

Current	Voltage*	
DC	24 V	W
AC	110-120 V, 50/60 Hz	Z
	230-250 V, 60 Hz	Y

* For other voltages consult ROSS.

Model Number examples: 2773B2003W, D2773B8003Z.

Size			Flow C_V (Nl/min)				Average Response Constants*					≈ Weight lb (kg)
Body	Port 1, 2	Port 3	Normally Closed (NC)		Normally Open (NO)		M	F				
								NC		NO		
			1-2	2-3	1-2	2-3		1-2	2-3	1-2	2-3	
3/8	1/4	1/2	2.5 (2500)	3.1 (3100)	2.3 (2300)	2.7 (2700)	10	0.90	0.80	0.99	0.88	2.5 (1.2)
	3/8	1/2	3.6 (3500)	5.3 (5200)	2.8 (2800)	3.2 (3100)	10	0.70	0.50	0.90	0.77	
	1/2	1/2	3.3 (3200)	5.3 (5200)	2.8 (2800)	3.2 (3100)	10	0.75	0.50	0.90	0.76	
3/4	1/2	1	6.3 (6200)	9.2 (9100)	6.3 (6200)	8.0 (7900)	11	0.43	0.27	0.46	0.60	3.3 (1.5)
	3/4	1	7.7 (7600)	11 (11000)	6.9 (6800)	7.4 (7300)	11	0.36	0.26	0.45	0.60	
	1	1	8.0 (7900)	12 (12000)	6.8 (6700)	7.5 (7400)	11	0.34	0.25	0.40	0.59	
1-1/4	1	1-1/2	23 (23000)	34 (33000)	17 (17000)	24 (24000)	28	0.17	0.14	0.20	0.17	7.0 (3.2)
	1-1/4	1-1/2	30 (30000)	32 (31000)	19 (19000)	24 (24000)	28	0.15	0.15	0.19	0.17	
	1-1/2	1-1/2	30 (30000)	31 (31000)	19 (19000)	23 (23000)	28	0.15	0.15	0.19	0.16	

* **Valve Response Time** – Response Time (msec) = M + (F • V). This is the average time required to fill a volume V (cubic inches) to 90% of supply pressure or to exhaust it to 10% of supply pressure. M and F values are shown above.

Valve Schematic

Normally Closed



Normally Open



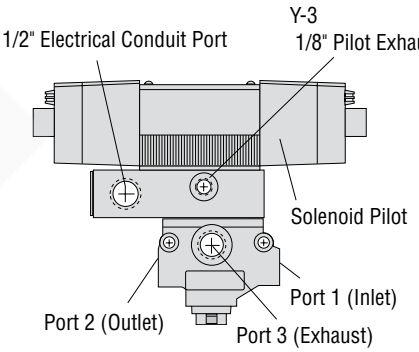



3/2 Direct Double Solenoid Controlled Valves

DIMENSIONS	Inches (mm)

Body Size 3/8

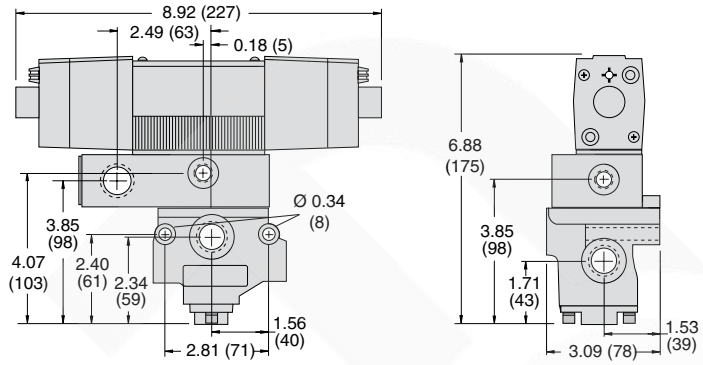

Body Size 3/4

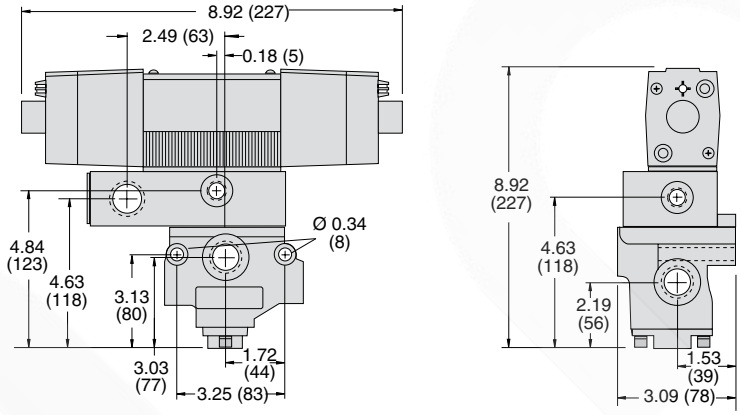

Body Size 1-1/4

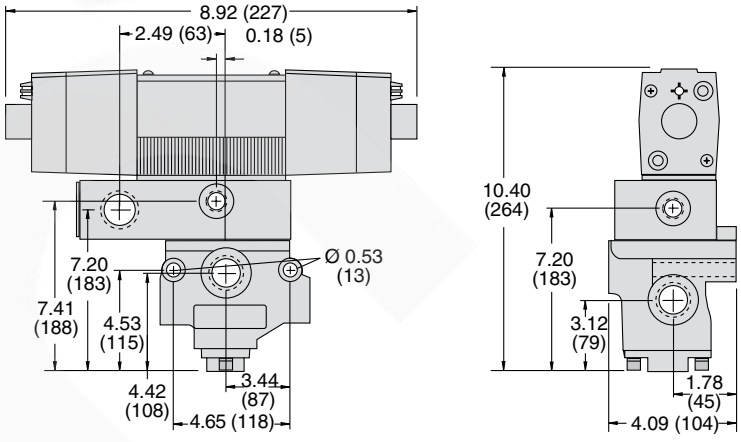

Downloadable CAD models available.

Ordering Information

4/2 Direct Double Solenoid Pilot Controlled Valves

MODEL NUMBER CONFIGURATOR — 4-Way 2-Position Valves

	27	7	6	B	2003	W

Port Thread	
NPT Leave Blank	
G	D

Series

Actuation
Direct Solenoid Controlled

Valve Function
4/2

Revision Level

Current	Voltage*	
DC	24 V	W
AC	110-120 V, 50/60 Hz	Z
	230-250 V, 60 Hz	Y

* For other voltages consult ROSS.

Body Size	Port Size		Internal Pilot Supply*
	In-Out	Exhaust	
3/8	1/4	1/2	2003
	3/8	1/2	3003
	1/2	1/2	4013
3/4	1/2	1	4003
	3/4	1	5003
	1	1	6013
1-1/4	1	1-1/2	6003
	1-1/4	1-1/2	7003
	1-1/2	1-1/2	8013

* For models with external pilot supply consult ROSS.

Model Number examples: 2776B2003W, D2776B8003Z.

Size			Flow Cv (Nl/min)		Average Response Constants *			≈ Weight lb (kg)
Body	Port 1, 2, 4	Port 3	1-2, 1-4	4-3, 2-3	M	F 1-2, 1-4	F 4-3, 2-3	
3/8	1/4	1/2	2.1 (2100)	2.9 (2900)	10	0.92	0.92	3.0 (1.4)
	3/8	1/2	2.9 (2900)	4.2 (4100)	10	0.90	0.90	
	1/2	1/2	3.1 (3100)	4.3 (4200)	10	0.89	0.73	
3/4	1/2	1	5.6 (5500)	8.1 (8000)	26	0.50	0.66	5.3 (2.4)
	3/4	1	7.0 (6900)	9.3 (9200)	26	0.36	0.55	
	1	1	7.8 (7700)	10 (9900)	26	0.35	0.50	
1-1/4	1	1-1/2	19 (19000)	26 (26000)	79	0.17	0.22	11.3 (5.1)
	1-1/4	1-1/2	21 (21000)	27 (27000)	79	0.16	0.18	
	1-1/2	1-1/2	22 (22000)	27 (27000)	79	0.15	0.15	

* **Valve Response Time** – Response Time (msec) = M + (F • V). This is the average time required to fill a volume V (cubic inches) to 90% of supply pressure or to exhaust it to 10% of supply pressure. M and F values are shown above.

Valve Schematic



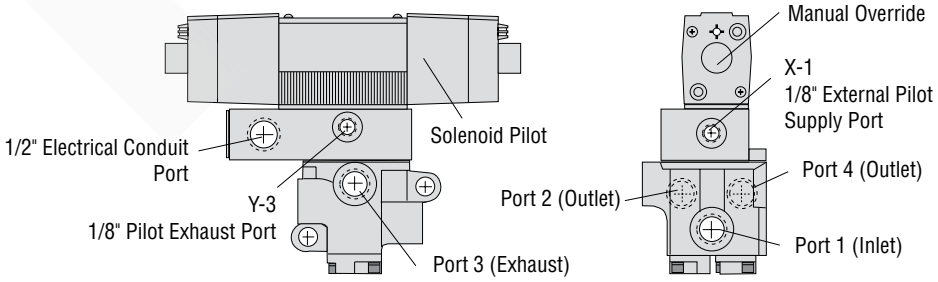

4/2 Direct Double Solenoid Pilot Controlled Valves

DIMENSIONS — Inches (mm)

Body Size 3/8

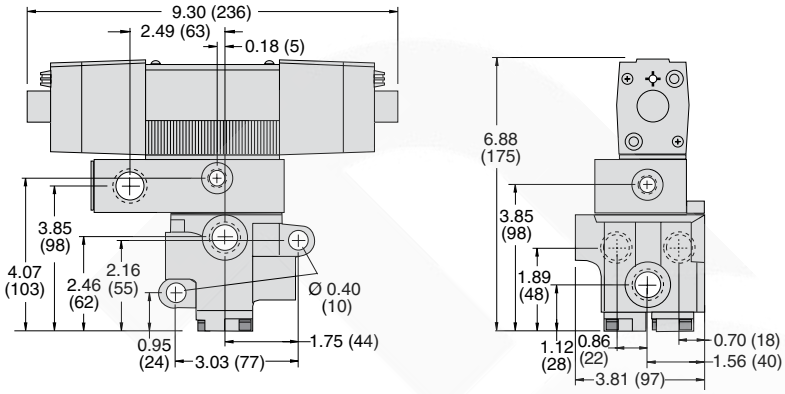

Body Size 3/4

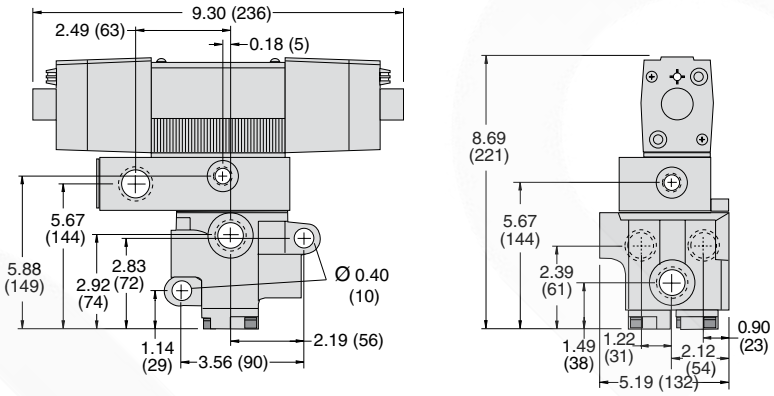

Body Size 1-1/4

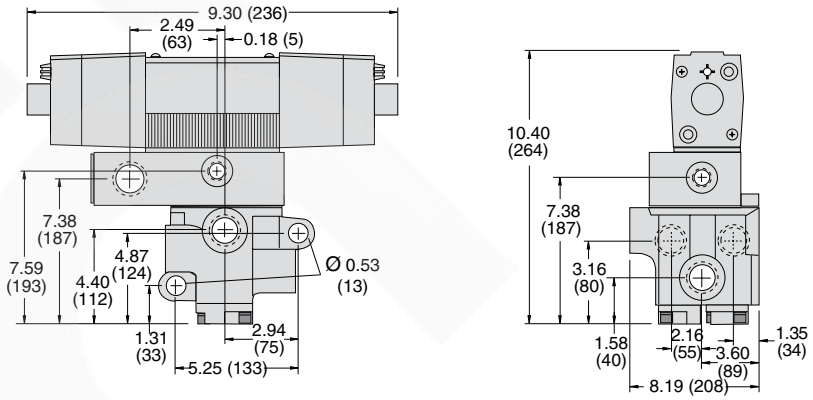

Downloadable CAD models available.

Ordering Information

2/2 Pressure Controlled Valves

MODEL NUMBER CONFIGURATOR — 2-Way 2-Position Valves

	27	5	1	A	2001

Port Thread	
NPT Leave Blank	
G	D

Series

Actuation
Pressure Controlled

Valve Function	
2/2 Normally Closed	1
2/2 Normally Open	2

Revision Level

Body Size	Port Size In-Out	
3/8	1/4	2001
	3/8	3001
	1/2	4011
3/4	1/2	4001
	3/4	5001
	1	6011
1-1/4	1	6001
	1-1/4	7001
	1-1/2	8011
2	1-1/2	8001
	2	9001
	2-1/2	9011

Model Number examples: 2751A2001, D2751A6001.

Size		Flow C_V (Nl/min)		Average Response Constants *			≈ Weight lb (kg)
Body	Port 1, 2	Normally Closed (NC)	Normally Open (NO)	M	F		
		1-2	1-2		NC	NO	
3/8	1/4	1.8 (1800)	1.8 (1800)	10	0.91	0.91	2.5 (1.2)
	3/8	3.2 (3100)	2.9 (2800)	10	0.70	0.76	
	1/2	3.9 (3800)	3.4 (3300)	10	0.64	0.72	
3/4	1/2	7.2 (7100)	6.5 (6400)	14	0.37	0.43	3.3 (1.5)
	3/4	9.1 (9000)	8.2 (8100)	14	0.34	0.39	
	1	9.9 (9700)	8.2 (8100)	14	0.34	0.37	
1-1/4	1	21 (21000)	21 (21000)	26	0.17	0.17	7.0 (3.2)
	1-1/4	30 (31000)	22 (22000)	26	0.15	0.19	
	1-1/2	32 (31000)	24 (24000)	26	0.15	0.18	
2	1-1/2	46 (45000)	46 (45000)	41	0.09	0.09	15.5 (6.9)
	2	59 (58000)	58 (57000)	41	0.07	0.07	
	2-1/2	66 (65000)	60 (59000)	41	0.07	0.06	

* **Valve Response Time** – Response Time (msec) = M + (F • V). This is the average time required to fill a volume V (cubic inches) to 90% of supply pressure or to exhaust it to 10% of supply pressure. M and F values are shown above.

Valve Schematic

Normally Closed	Normally Open
	



2/2 Pressure Controlled Valves

DIMENSIONS	Inches (mm)

Body Size 3/8

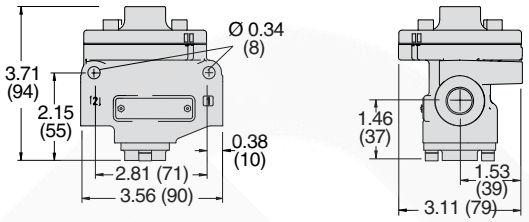

Body Size 3/4

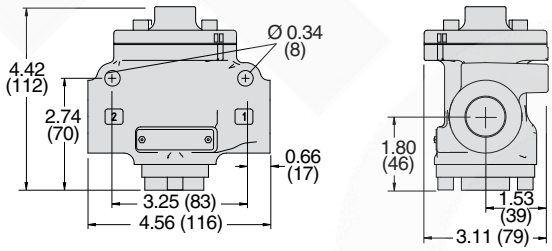

Body Size 1-1/4

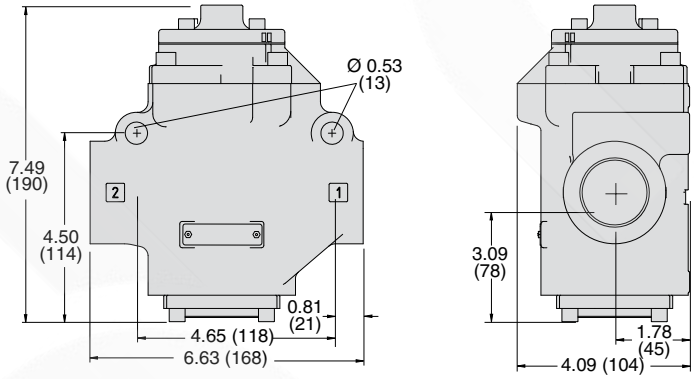

Body Size 2

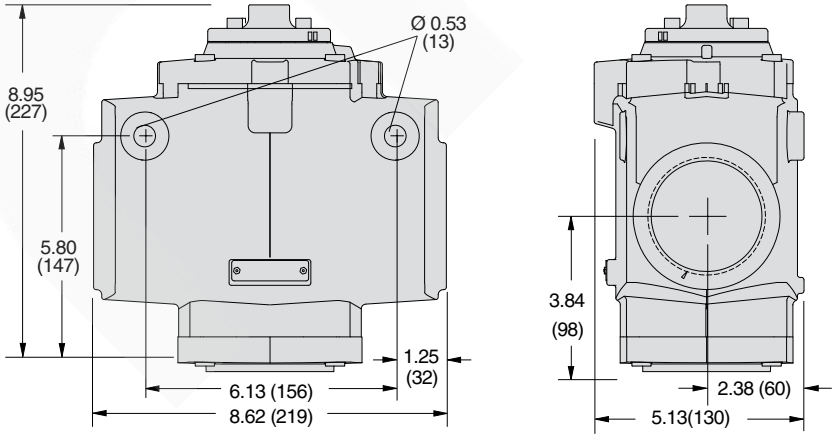

Downloadable CAD models available.

Ordering Information

3/2 Pressure Controlled Valves

MODEL NUMBER CONFIGURATOR — 3-Way 2-Position Valves

	27	5	3	A	2001

Port Thread	
NPT Leave Blank	
G	D

Series

Actuation
Pressure Controlled

Valve Function	
3/2 Normally Closed	3
3/2 Normally Open	4

Revision Level

Body Size	Port Size		
	In-Out	Exhaust	
3/8	1/4	1/2	2001
	3/8	1/2	3001
	1/2	1/2	4011
3/4	1/2	1	4001
	3/4	1	5001
	1	1	6011
1-1/4	1	1-1/2	6001
	1-1/4	1-1/2	7001
	1-1/2	1-1/2	8011
2	1-1/2	2-1/2	8001
	2	2-1/2	9001
	2-1/2	2-1/2	9011

Model Number examples: 2753A2001, D2753A6001.

Size			Flow C_v (Nl/min)				Average Response Constants *					≈ Weight lb (kg)
Body	Port 1, 2	Port 3	Normally Closed (NC)		Normally Open (NO)		M	F				
								NC		NO		
			1-2	2-3	1-2	2-3		1-2	2-3	1-2	2-3	
3/8	1/4	1/2	1.9 (1900)	3.3 (3200)	1.7 (1700)	3.0 (3000)	10	0.90	0.80	0.99	0.88	1.3 (0.6)
	3/8	1/2	2.9 (2800)	4.4 (4300)	2.8 (2800)	3.0 (3000)	10	0.70	0.50	0.90	0.77	
	1/2	1/2	3.8 (3800)	5.0 (4900)	3.0 (3000)	3.0 (3000)	10	0.75	0.50	0.90	0.76	
3/4	1/2	1	6.2 (6100)	9.4 (9300)	6.1 (6000)	8.0 (7900)	12	0.43	0.17	0.46	0.60	2.0 (0.9)
	3/4	1	8.2 (8100)	10 (9800)	7.7 (7600)	8.0 (7900)	12	0.36	0.26	0.45	0.60	
	1	1	9.1 (9000)	12 (12000)	8.3 (8200)	8.0 (7900)	12	0.34	0.25	0.40	0.59	
1-1/4	1	1-1/2	21 (21000)	27 (27000)	18 (18000)	20 (20000)	32	0.17	0.14	0.20	0.17	6.0 (2.7)
	1-1/4	1-1/2	29 (29000)	29 (29000)	21 (21000)	22 (22000)	32	0.15	0.15	0.19	0.17	
	1-1/2	1-1/2	30 (30000)	30 (30000)	21 (21000)	25 (25000)	32	0.15	0.15	0.19	0.16	
2	1-1/2	2-1/2	45 (44000)	75 (74000)	45 (44000)	53 (52000)	76	0.05	0.04	0.07	0.04	15.3 (6.9)
	2	2-1/2	57 (56000)	78 (77000)	55 (54000)	61 (60000)	76	0.05	0.04	0.05	0.04	
	2-1/2	2-1/2	66 (65000)	82 (81000)	61 (60000)	71 (70000)	76	0.05	0.04	0.05	0.04	

* **Valve Response Time** – Response Time (msec) = M + (F • V). This is the average time required to fill a volume V (cubic inches) to 90% of supply pressure or to exhaust it to 10% of supply pressure. M and F values are shown above.

Valve Schematic

Normally Closed



Normally Open



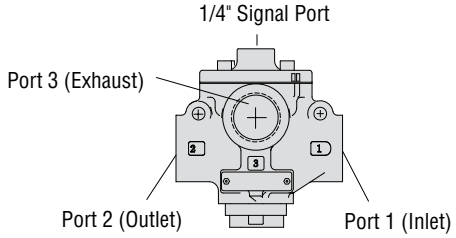

3/2 Pressure Controlled Valves

DIMENSIONS	Inches (mm)

Body Size 3/8

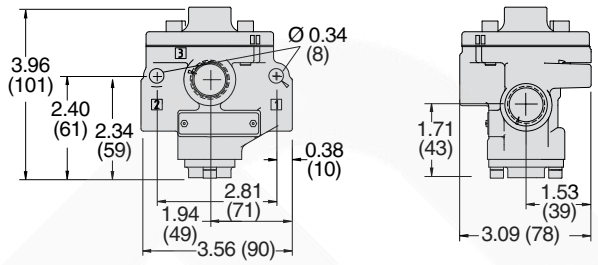

Body Size 3/4

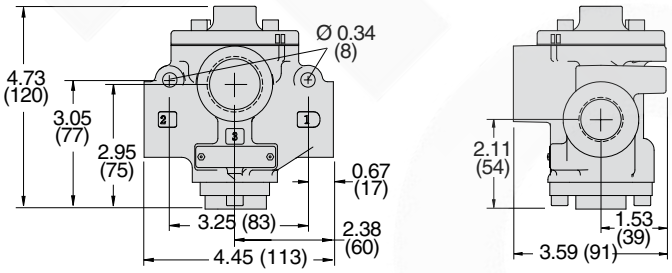

Body Size 1-1/4

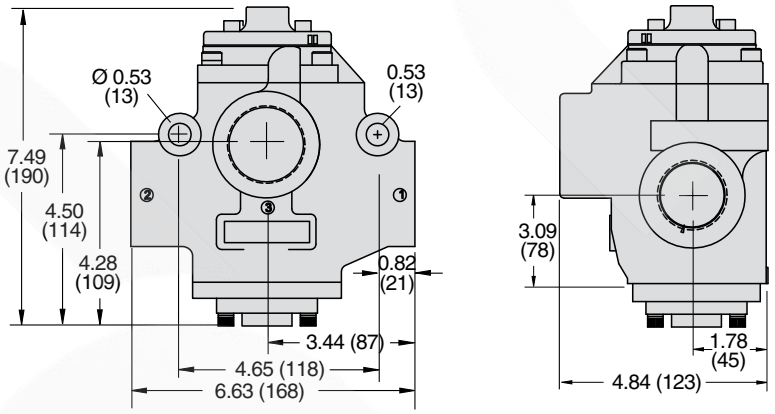

Body Size 2

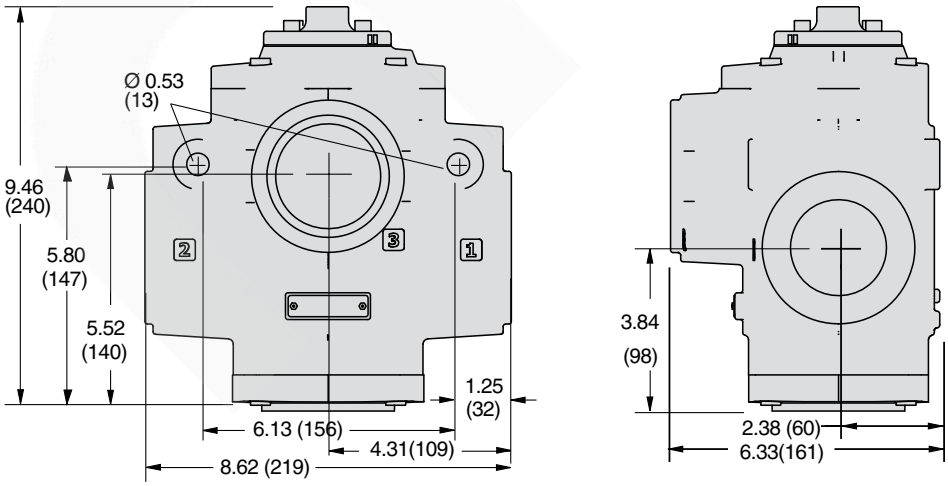

Downloadable CAD models available.

Ordering Information

4/2 Pressure Controlled Valves

MODEL NUMBER CONFIGURATOR — 4-Way 2-Position Valves

		27	5	6	A	2001

Port Thread	
NPT Leave Blank	
G	D

Series

Actuation
Pressure Controlled

Valve Function
4/2

Revision Level

Body Size	Port Size		
	In-Out	Exhaust	
3/8	1/4	1/2	2001
	3/8	1/2	3001
	1/2	1/2	4011
3/4	1/2	1	4001
	3/4	1	5001
	1	1	6011
1-1/4	1	1-1/2	6001
	1-1/4	1-1/2	7001
	1-1/2	1-1/2	8011

Model Number examples: 2756A2001, D2756A2001.

Size			Flow Cv (Nl/min)		Average Response Constants *			≈ Weight lb (kg)
Body	Port 1, 2, 4	Port 3	1-2, 1-4	4-3, 2-3	M	F 1-2, 1-4	F 4-3, 2-3	
3/8	1/4	1/2	2.1 (2100)	2.9 (2900)	10	0.92	0.92	1.8 (0.8)
	3/8	1/2	2.9 (2900)	4.2 (4100)	10	0.90	0.90	
	1/2	1/2	3.1 (3100)	4.3 (4200)	10	0.89	0.73	
3/4	1/2	1	5.6 (5500)	8.1 (8000)	26	0.50	0.66	4.3 (1.9)
	3/4	1	7.0 (6900)	9.3 (9200)	26	0.36	0.55	
	1	1	7.8 (7700)	10 (9800)	26	0.35	0.50	
1-1/4	1	1-1/2	19 (19000)	26 (26000)	79	0.22	0.22	10.3 (4.6)
	1-1/4	1-1/2	21 (21000)	27 (27000)	79	0.18	0.18	
	1-1/2	1-1/2	22 (22000)	27 (27000)	79	0.15	0.15	

* **Valve Response Time** – Response Time (msec) = M + (F • V). This is the average time required to fill a volume V (cubic inches) to 90% of supply pressure or to exhaust it to 10% of supply pressure. M and F values are shown above.

Valve Schematic



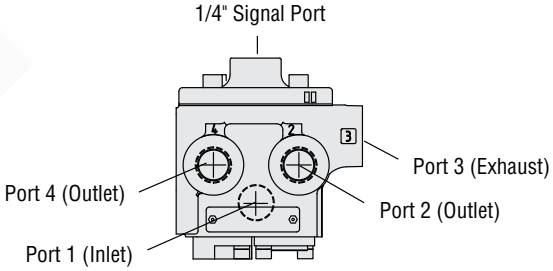

4/2 Pressure Controlled Valves

DIMENSIONS	Inches (mm)

Body Size 3/8

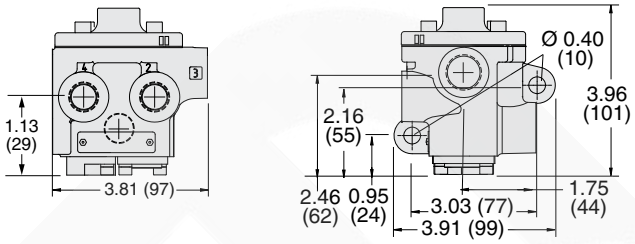

Body Size 3/4

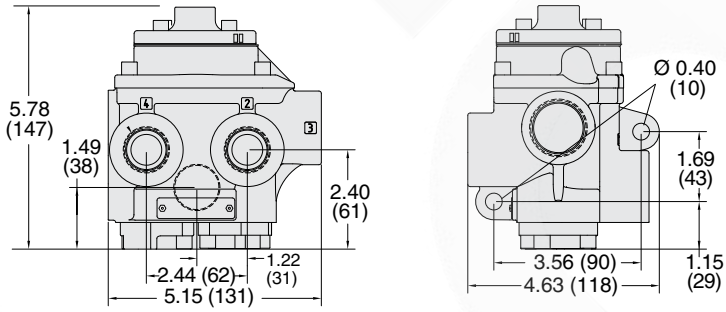

Body Size 1-1/4

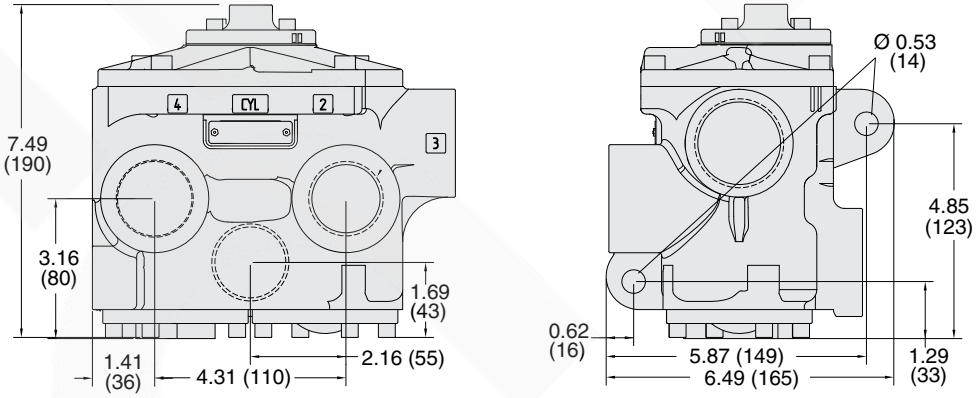

Downloadable CAD models available.

EXHAUST SILENCERS

Illustration example.

Silencers

SPECIFICATIONS	Silencer Material	Pressure Range psig (bar)	Schematic
	Aluminum	0-290 (0-20) maximum	

Port Size	Thread Type	Flow C_v (Nl/min)	Model Number		Dimensions inches (mm)		≈ Weight lb (kg)
			NPT Thread	R/Rp Thread	Length	Hex Size (D)	
1/2	Male	6.8 (6700)	5500A4003	D5500A4003	3.6 (9)	1.25 (32)	0.2 (0.1)
1	Male	18 (18000)	5500A6003	D5500A6003	5.4 (14)	2.0 (51)	0.9 (0.4)
1-1/2	Female	39 (38000)	5500A8001	D5500A8001	5.7 (14)	2.5 (64)	1.3 (0.6)
2-1/2	Female	104 (100000)	5500A9002	D5500A9002	4.0 (102)	5.7 (145)	2.9 (1.4)

FEMALE SILENCER CONNECTORS

Hex Nipples

Material	Fitting Pipe Size	Thread Type	Model Number		
			NPT Thread	BSPT Thread	
Steel	1-1/2	Male - Male	488J27	122J39	
	2-1/2	Male - Male	490J27	123J39	

SOLENOID PILOT INDICATOR LIGHT KITS



Illustration example.

	Kit Number		
Indicator Light Kits	**24 V DC**	**110-120 V AC, 50-60 Hz**	**230 V AC, 50-60 Hz**
	862K87-W	862K87-Z	862K87-Y
	To visually verify valve operation, indicator light kits are available for single solenoid models. Indicator lights are standard on double solenoid valves. The indicator light is illuminated when the solenoid is energized.		

SOLENOID PILOT MANUAL OVERRIDE KITS

Flush Button	Extended Button	Extended Button with Palm

Illustration examples.

	Manual Override Type	Kit Number	
		Locking Type	**Non-Locking Type**
Manual Override Kits	Flush Button	792K87	790K87
	Extended Button	–	791K87
	Extended Button with Palm	–	984H87
	Flush rubber button, non-locking manual override is standard on solenoid models. Each of the buttons in the override kits is made of metal and is spring-returned. The locking type button, however, can be kept in the actuated position by turning the slot in the top of the button with a screwdriver.		