



Radar filling level meter for liquids and bulk solids suitable for use in applications with aggressive fluids or with hygienic requirements

- Continuous filling level measurement up to 120 m, 4...20 mA, 2-wire
- Available process connections: mounting bracket, thread (G, NPT ¾ and 1½), flange (DN50, 2" ASME), clamp (2")
- Excellent radar signal focusing and high measurement dynamics
- Adjustable via the display/configuration module and keys, alternatively via Bluetooth

Product variants described in the data sheet may differ from the product presentation and description.

Can be combined with

	Type 8619 ▶ multiCELL - Multi-channel and multi-function transmitter/controller
	Type 8692 ▶ Digital electro-pneumatic positioner for integrated mounting on process control valves
	Type 8647 ▶ AirLINE SP – electropneumatic automation system
	Type ME44 ▶ I/O module, IP20

Type description

The device Type 8140 is a non-contact radar level meter for continuous level measurement. The device is available with different antennas, connection types and sizes, making it useful for a wide range of applications.

The variant with integrated antenna, available with G or NPT connection, is particularly suitable for level measurement of liquids and bulk solids, especially in small tanks. The variant with plastic horn antenna, available with mounting bracket, is recommended for level measurement in open channels or streams. The variant with an encapsulated antenna system is available either with a clamp connection (DIN 32676, ISO 2852) for hygienic requirements or with a flange connection (DIN 2501/EN 1092-1).

For high-temperature and high-pressure applications, a device with a metal horn antenna is also available.

The excellent focus of the radar signal and the high measurement dynamics allow excellent measurement results even in small, narrow and high containers, as the risk of signal interference by installations, constructions and vessel walls is significantly reduced. Signal damping, e.g. due to signal length, foaming or low dielectric constant values of liquids, become much less important.




Table of contents

1. General technical data	3
1.1. About the device	3
1.2. All variants.....	3
1.3. Variant with plastic horn antenna.....	4
1.4. Variant with integrated antenna and thread connection	5
1.5. Variant with encapsulated antenna system and flange connection.....	5
1.6. Variant with encapsulated antenna system and hygienic connection	6
2. Approvals and conformities	6
2.1. General notes.....	6
2.2. Conformity	6
2.3. Standards.....	6
2.4. Explosion protection	7
2.5. Foods and beverages/Hygiene	7
3. Materials	8
3.1. Bürkert resistApp	8
4. Dimensions	8
4.1. Variant with plastic horn antenna.....	8
4.2. Variant with integrated antenna and thread connection	9
4.3. Variant with encapsulated antenna system and flange connection.....	10
4.4. Variant with encapsulated antenna system and hygienic connection	11
5. Performance specifications	11
5.1. Measurement deviation diagram.....	11
5.2. Temperature derating diagram	12
Variant with plastic horn antenna.....	12
Variant with integrated antenna and thread connection	12
Variant with encapsulated antenna system and flange connection.....	12
6. Product installation	13
6.1. Mounting options	13
Variant with plastic horn antenna with mounting bracket.....	13
Variant with plastic horn antenna with flange	13
7. Product operation	14
7.1. Measuring principle.....	14
7.2. Product operation notes	14
Operating techniques.....	14
Set up with display/configuration module	14
8. Product accessories	15
9. Ordering information	16
9.1. Bürkert eShop.....	16
9.2. Bürkert product filter.....	16
9.3. Ordering chart.....	16
9.4. Ordering chart accessories.....	17

1. General technical data

1.1. About the device

The device is equipped with a plastic horn antenna, an integrated horn antenna or with an encapsulated antenna system. The latter variant is available with flange or hygienic connection. The technical data depends on the radar level meter variant.

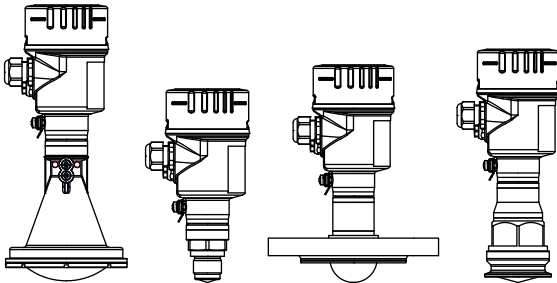

1.2. All variants

Product properties

Material

Make sure the device materials are compatible with the fluid you are using. Further information can be found in chapter [“3.1. Bürkert resistApp” on page 8.](#)

Non wetted parts

Cover	Stainless steel 316L (1.4404)
Housing	Stainless steel 316L (1.4404)
Grounding terminal and screw	Stainless steel 316L
Seal	Between housing and cover: EPDM
Cable gland	PA
Blind plug	PA
Dimensions	Further information can be found in chapter “4. Dimensions” on page 8.
Weight	Approx. 2...17.2 kg (depending on process connection and antenna)
Measured quantity	Distance between the end of the sensor antenna and the product surface.
Damping (63 % of the input variable)	0...999 s, adjustable

Product accessory

Display/configuration module	LCD in full dot matrix (optional, must be ordered separately)
------------------------------	---

Performance data

Blocking distance	Null
Measuring range resolution	1 mm
Measurement deviation	According to EN 60770-1: ≤ 1 mm for liquids (measuring distance > 0.25 m). Further information can be found in chapter “5.1. Measurement deviation diagram” on page 11.
Non-repeatability ¹⁾	≤ 1 mm
Measuring frequency	W-Band (80 GHz technology)
Measuring cycle time ²⁾	Approx. 200 ms
Step response time ^{2),3)}	≤ 3 s
Temperature drift	$< 0.03\%$ /10K relating to the 16.7 mA span

Electrical data

Operating voltage (U_n)	12...35 V DC
Power source (not supplied)	Limited power source according to UL/EN 62368-1 standards or limited energy circuit according to UL/EN 61010-1 §9.4
DC reverse polarity protection	Yes
Residual ripple (at DC)	<ul style="list-style-type: none"> For $12\text{ V} < U_n < 18\text{ V}$: $\leq 0.7\text{ V}_{\text{eff}}$ (16...400 Hz) For $18\text{ V} < U_n < 35\text{ V}$: $\leq 1.0\text{ V}_{\text{eff}}$ (16...400 Hz)
Overvoltage category according to IEC 61010-1	Category III
Protection class according to IEC 61010-1	Class III
Starting current	$\leq 3.6\text{ mA}$; $\leq 10\text{ mA}$ for 5 ms after switching on
Load resistor	$(U_n - U_{\text{min}})/0.022\text{ A}$

Output	4...20 mA/HART
Range of the output signal	3.8...20.5 mA/HART (default setting)
Signal resolution	0.3 μ A
Max. output current	22 mA
Fault signal	Current output: mA value unchanged, ≥ 21 mA or ≤ 3.6 mA (adjustable)
Voltage supply cable	<ul style="list-style-type: none"> Cable diameter: 5...9 mm or 6...12 mm Wire cross-section: 0.5 mm² (AWG 20)

Process/Pipe connection & communication

Electrical connection	Cable gland M20 x 1.5
-----------------------	-----------------------

Approvals and conformities

Directives

CE directive Further information on the CE Directive can be found in chapter "2.3. Standards" on page 6.

NAMUR recommendation
 NE21 - Electromagnetic compatibility of equipment
 NE43 - Signal level for fault information from measuring transducers
 NE53 - Compatibility of field devices and display/adjustment components
 NE107 - Self-monitoring and diagnosis of field devices

Explosion protection ATEX/IECEX⁴⁾: EN IEC 60079-0:2018, IEC 60079-26:2021, EN 60079-11:2012
 Further information can be found in chapter "2.4. Explosion protection" on page 7.

Foods and beverages/Hygiene On request

- 3-A Sanitary Standards Inc.⁴⁾
- EHEDG (Type EL CLASS I)⁴⁾
- FDA declaration of conformity⁴⁾
- 1935/2004/EC declaration⁴⁾

 Further information can be found in chapter "2.5. Foods and beverages/Hygiene" on page 7.

Others

- Radio licenses⁴⁾: Europe (in EC declaration), New Zealand, USA, South Korea, Australia, Canada, Brazil, Malaysia, Serbia, Japan, Thailand, India, Taiwan, Morocco, Ukraine, South Africa

Environment and installation

Ambient temperature	Operation and storage: -40...+80 °C (-40...+176 °F)
Temperature derating	Depending on antenna system Further information can be found in chapter "5.2. Temperature derating diagram" on page 12.
Relative air humidity	20...85 %, without condensation
Height above sea level	By default: max. 2000 m With connected overvoltage protection: max. 5000 m
Degree of protection according to IEC/EN 60529	IP66/IP67 with cable plug mounted and tightened M20 x 1.5
Pollution degree	Degree 4 (when used with fulfilled housing protection)

1.) Already included in the measurement deviation

2.) With operating voltage $U_n \geq 24$ V DC

3.) Time span after a sudden distance change from 1...5 m until the output signal reaches 90 % of the final value for the first time (IEC 61298-2).

4.) Approval of VEGAPULS6X product range from VEGA

1.3. Variant with plastic horn antenna

Product properties

Material

Non wetted parts

Mounting strap	Stainless steel 316L (1.4435)
Fixing screw	Stainless steel 316L (1.4435)

Wetted parts

Antenna	Antenna cone: PBT-GF30
Focus lens	PP
Beam angle ¹⁾	3°
Measuring range	0...120 m

Product accessory

Adapter flange	Non wetted parts: <ul style="list-style-type: none"> Adapter flange fixing screw made of stainless steel 304 Wetted parts: <ul style="list-style-type: none"> Adapter flange made of PP-GF30 black Sealing of the adaptor flange made of FKM (COG VI500)
----------------	---

Medium data

Process temperature	-40...+80 °C (-40...+176 °F)
Process pressure	Vessel pressure: -1...1 bar (-100...100 kPa/-14.5...14.5 psig) for variant with adapter flange

Process/Pipe connection & communication

Process connection	Mounting bracket 170 mm (supplied as standard) or 300 mm (accessory)
--------------------	--

1.) Outside the specified beam angle, the energy level of the radar signal is 50 % (-3 dB) less.

1.4. Variant with integrated antenna and thread connection

Product properties
Material
Wetted parts

Process connection	Stainless steel 316L
Antenna	PEEK
Seal	<ul style="list-style-type: none"> Antenna system: FKM Process: NBR with aramid fibres

Beam angle ^{1.)}	<ul style="list-style-type: none"> 14° for variant G ¾ or NPT ¾ 7° for variant G 1½ or NPT 1½
---------------------------	---

Measuring range	<ul style="list-style-type: none"> 0...10 m for variant G ¾ or NPT ¾ 0...20 m for variant G 1½ or NPT 1½
-----------------	--

Medium data

Process temperature ^{2.)}	<ul style="list-style-type: none"> -40...+80 °C (-40...+176 °F) for variant G 1½ PN 3 -40...+150 °C (-40...+302 °F) for the other variants
------------------------------------	--

Process pressure	Vessel pressure: <ul style="list-style-type: none"> -1...3 bar (-100...300 kPa/-14.5...43.5 psig) for variant G 1½ PN 3 -1...40 bar (-100...4000 kPa/-14.5...580.2 psig) for the other variants
------------------	---

Process/Pipe connection & communication

Process connection	Thread G or NPT, ¾ or 1½"
--------------------	---------------------------

1.) Outside the specified beam angle, the energy level of the radar signal is 50 % (-3 dB) less.

2.) Take into account reduced ambient temperature. Further information can be found in chapter "5.2. Temperature derating diagram" on page 12.

1.5. Variant with encapsulated antenna system and flange connection

Product properties
Material
Wetted parts

Process connection	Flange plating: PTFE and PFA
Antenna	Antenna encapsulation: PTFE and PFA
Seal	PTFE

Beam angle ^{1.)}	6° for variant DN 50
---------------------------	----------------------

Measuring range	0...30 m for variant DN 50
-----------------	----------------------------

Medium data

Process temperature ^{2.)}	-40...+150 °C (-40...+302 °F)
SIP process temperature	+150 °C (+302 °F), vapour stratification up to 2 hours

Process pressure	Vessel pressure: -1...25 bar (-100...2500 kPa/-14.5...362.6 psig)
------------------	---

Process/Pipe connection & communication

Process connection	Flange DN 50 according to EN1092-1/DIN 2501 or 2" according to ASME
--------------------	---

1.) Outside the specified beam angle, the energy level of the radar signal is 50 % (-3 dB) less.

2.) Take into account reduced ambient temperature. Further information can be found in chapter "5.2. Temperature derating diagram" on page 12.

1.6. Variant with encapsulated antenna system and hygienic connection

Product properties

Material

Wetted parts

Antenna	Hygienic antenna encapsulation: PEEK
Seal	EPDM
Surface quality	Antenna encapsulation: Ra < 0.8 µm
Beam angle ^{1.)}	6°
Measuring range	0...30 m

Medium data

Process temperature	-40...+150 °C (-40...+302 °F)
SIP process temperature	+150 °C (+302 °F), vapour stratification up to 2 hours
Process pressure	Vessel pressure: -1...25 bar (-100...2500 kPa/-14.5...362.6 psig)

Process/Pipe connection & communication

Process connection	Clamp 2" according to DIN 32676 or ISO 2852
--------------------	---

1.) Outside the specified beam angle, the energy level of the radar signal is 50 % (-3 dB) less.

2. Approvals and conformities

2.1. General notes

- The approvals and conformities listed below must be stated when making enquiries. This is the only way to ensure that the product complies with all required specifications.
- Not all available versions can be supplied with the below mentioned approvals or conformities.



2.2. Conformity

In accordance with the Declaration of Conformity, the product is compliant with the EU Directives.

2.3. Standards




The applied standards which are used to demonstrate compliance with the EU Directives are listed in the EU-Type Examination Certificate and/or the EU Declaration of Conformity.

2.4. Explosion protection

Approval	Description
 	<p>Optional: Explosion protection^{1.)} Ex marking of the components according to:</p> <p>ATEX: CSANe 22ATEX1019X</p> <ul style="list-style-type: none"> • II 1G Ex ia IIC T6...T1 Ga • II 1/2G Ex ia IIC T6...T1 Ga/Gb • II 2G Ex ia IIC T6...T1 Gb <p>IECEX: IECEX CSAE 22.0011X</p> <ul style="list-style-type: none"> • Ex ia IIC T6...T1 Ga • Ex ia IIC T6...T1 Ga/Gb • Ex ia IIC T6...T1 Gb <p>Measures for compliance with ATEX/IECEX requirements: see Additional manual/Supplement ATEX/IECEX Type 8140 ▶ under "User manuals". The Ex. certification is only valid if the Bürkert device is used as described in the additional manual/supplement. Any unauthorized modifications made to the device will invalidate the Ex certification.</p>

1.) Approval of VEGAPULS6X product range from VEGA

2.5. Foods and beverages/Hygiene

Approval	Description
	<p>3-A Sanitary Standards Inc.^{1.)} (valid for the variable code PE05) The products comply with 3-A Sanitary Standards Inc (3-A SSI) as per certificate.</p>
	<p>EHEDG^{1.)} (European Hygienic Engineering and Design Group) (Type EL CLASS I) (valid for the variable code PI01) The products comply with EHEDG (European Hygienic Engineering and Design Group) (Type EL CLASS I) as per certificate.</p>
Conformity	Description
<p>FDA</p>	<p>FDA^{1.)} – Code of Federal Regulations (valid for the variable code PL03) The devices comply in their composition with the Code of Federal Regulations published by the FDA (Food and Drug Administration, USA).</p>
	<p>EC Regulation 1935/2004^{1.)} of the European Parliament and of the Council (valid for the variable code PL01) All wetted materials are compliant with EC Regulation 1935/2004 according to the manufacturer's declaration.</p>

1.) Approval of VEGAPULS6X product range from VEGA

DTS 1000604793 EN Version: A Status: RL (released | freigegeben | validé) printed: 24.01.2024

3. Materials

3.1. Bürkert resistApp



Bürkert resistApp – Chemical resistance chart

You want to ensure the reliability and durability of the materials in your individual application case? Verify your combination of media and materials on our website or in our resistApp.


[Start chemical resistance check](#)

4. Dimensions

4.1. Variant with plastic horn antenna

Note:

Dimensions in mm, unless otherwise stated

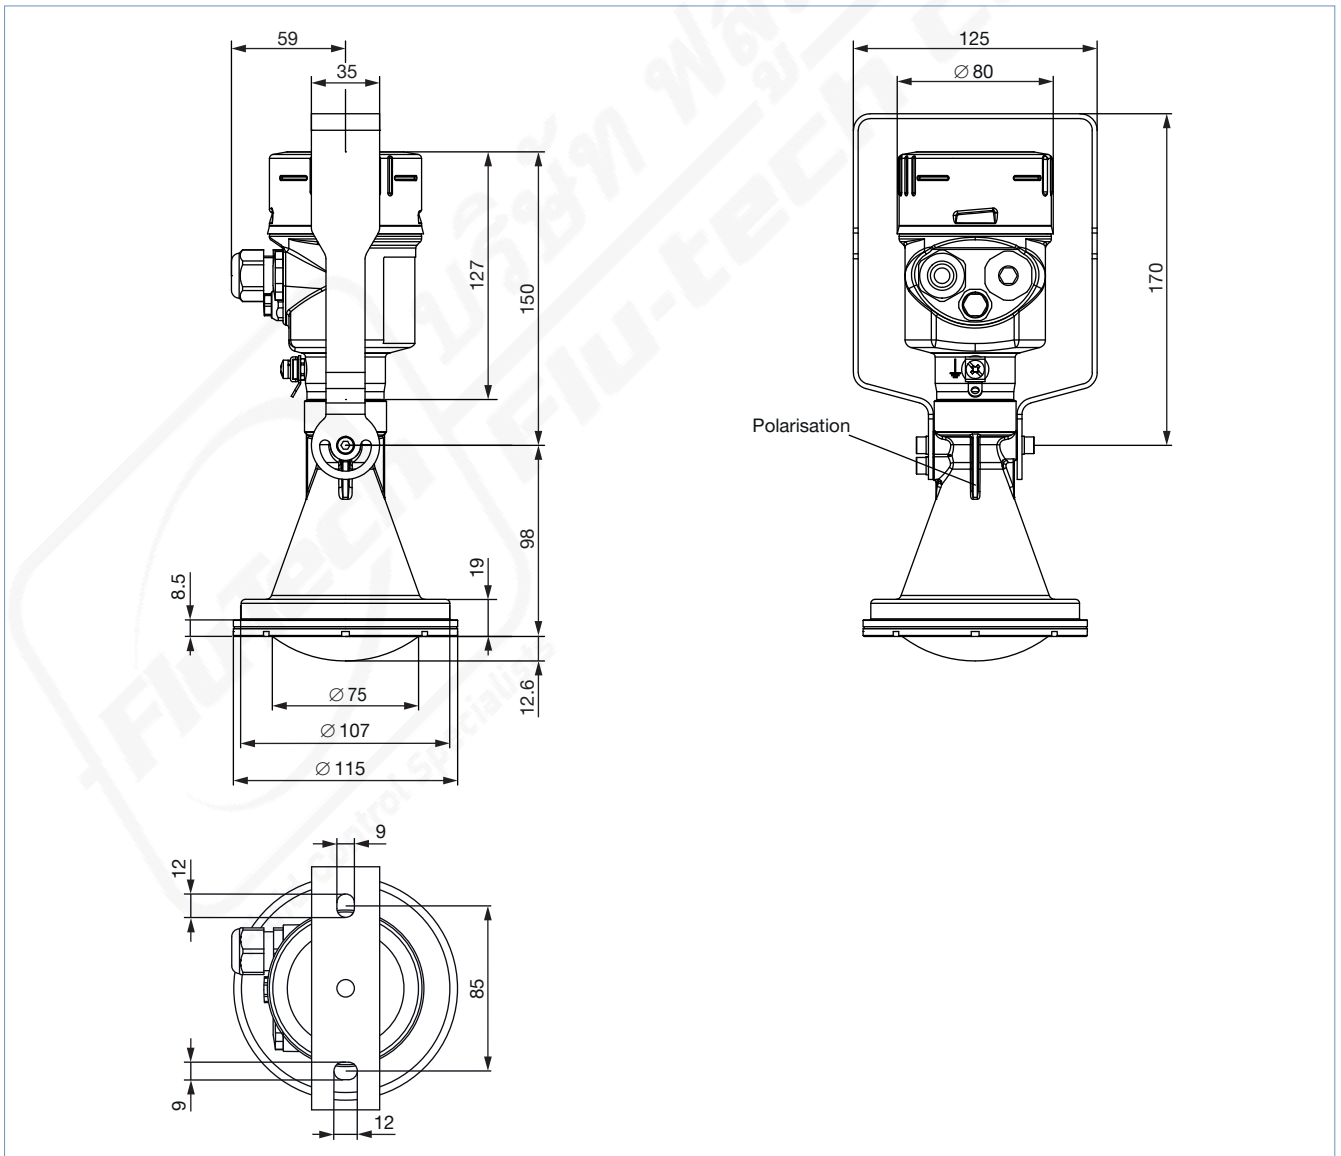


DTS 1000604793 EN Version: A Status: RL (released | freigegeben | validé) printed: 24.01.2024

4.2. Variant with integrated antenna and thread connection

Note:

Dimensions in mm, unless otherwise stated

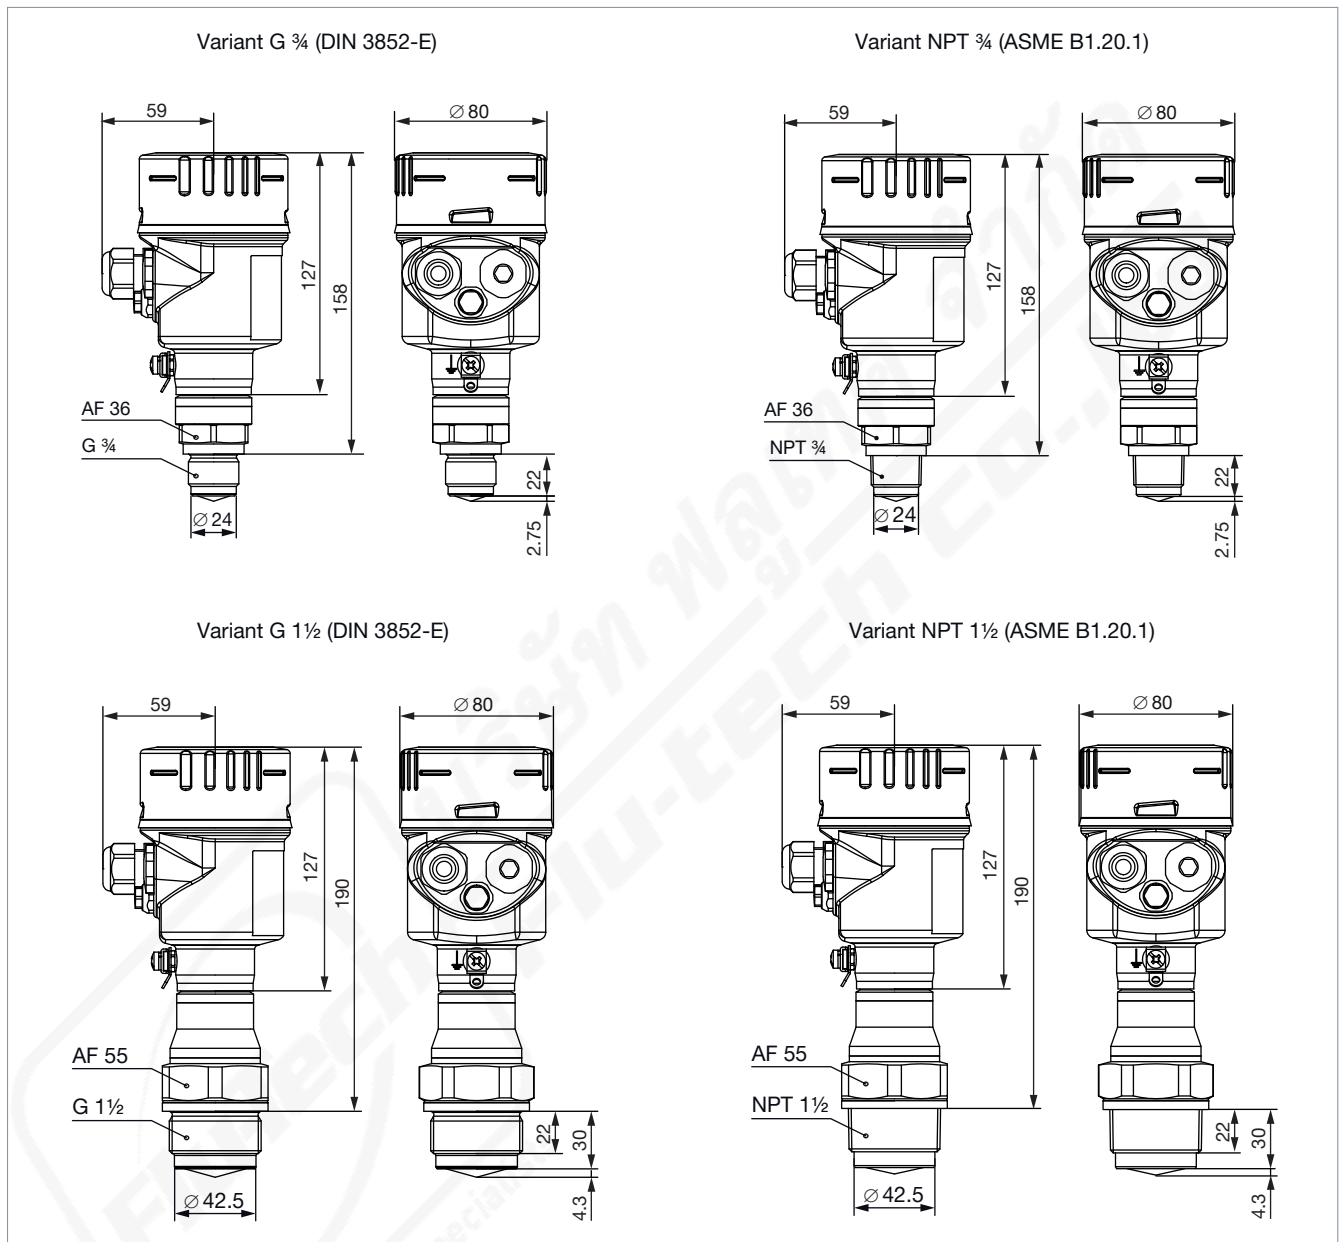


DTS 1000604793 EN Version: A Status: RL (released | freigegeben | validé) printed: 24.01.2024

4.3. Variant with encapsulated antenna system and flange connection


Note:

Dimensions in mm, unless otherwise stated

Variant flange EN1092-1, form B1, DN50 PN40

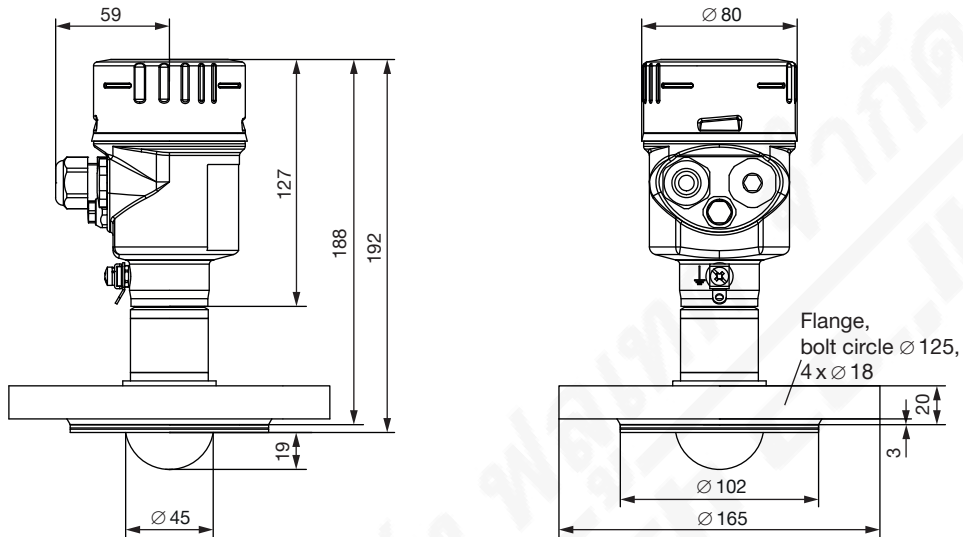

Variant flange ASME-B16.5, form B1, 2" 150 RF

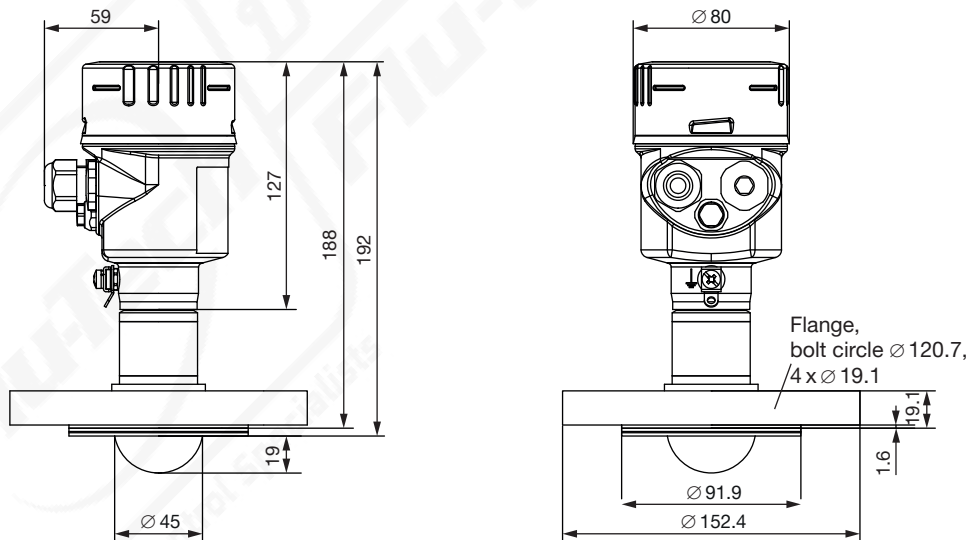


DTS 1000604793 EN Version: A Status: RL (released | freigegeben | valide) printed: 24.01.2024

4.4. Variant with encapsulated antenna system and hygienic connection

Note:

Dimensions in mm, unless otherwise stated

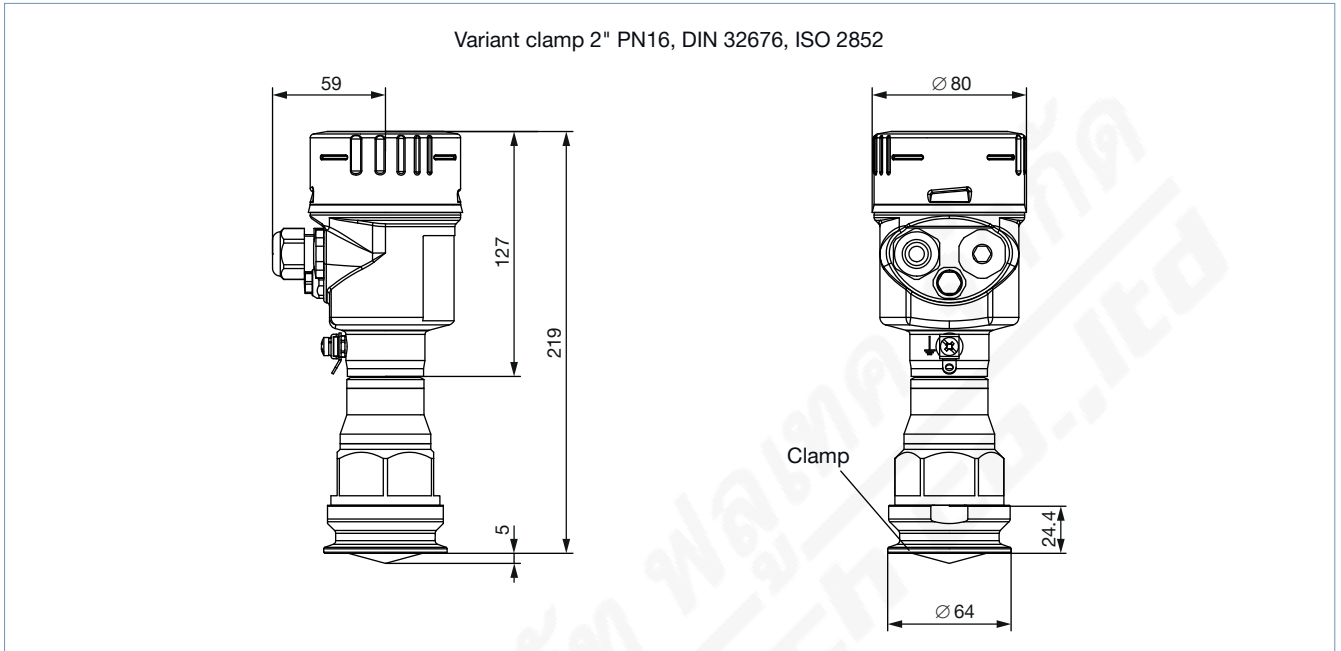


5. Performance specifications

5.1. Measurement deviation diagram

Note:


The drawing shows the measurement deviation of Type 8140 with thread and integrated horn antenna under reference conditions. This applies accordingly to all variants.

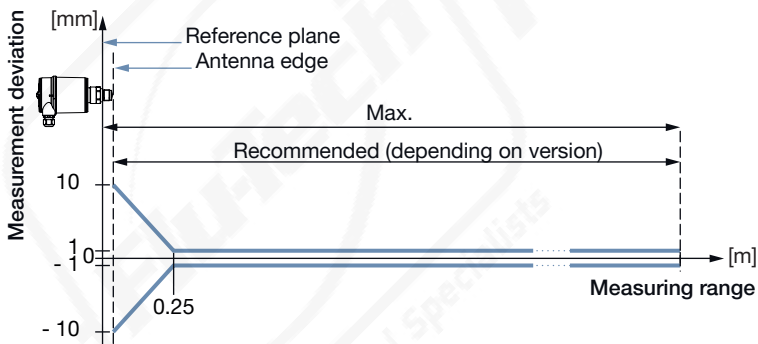


DTS 1000604793 EN Version: A Status: RL (released | freigegeben | validé) printed: 24.01.2024

5.2. Temperature derating diagram


Variant with plastic horn antenna

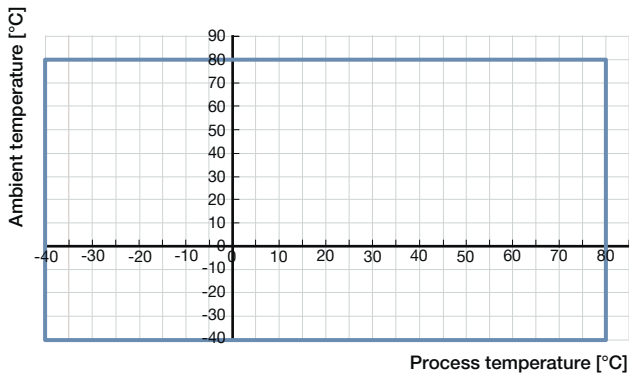

Variant with integrated antenna and thread connection

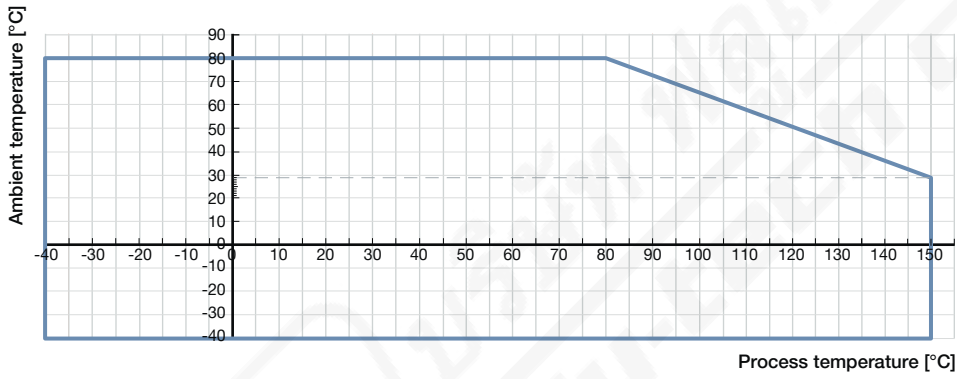

Variant with encapsulated antenna system and flange connection

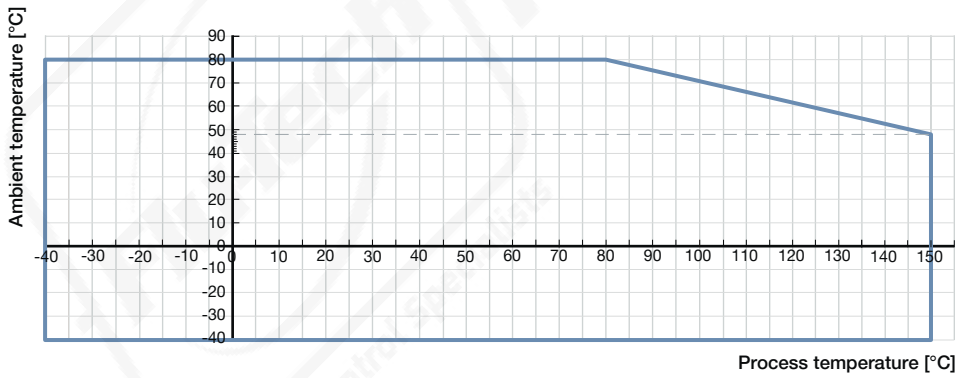



DTS 1000604793 EN Version: A Status: RL (released | freigegeben | validé) printed: 24.01.2024

6. Product installation

6.1. Mounting options


Variant with plastic horn antenna with mounting bracket

The mounting bracket allows simple mounting of the instrument on a wall, ceiling or boom. Especially in the case of open flumes, this is a simple and effective way to align the sensor to the surface of the liquids.

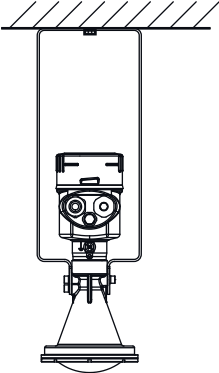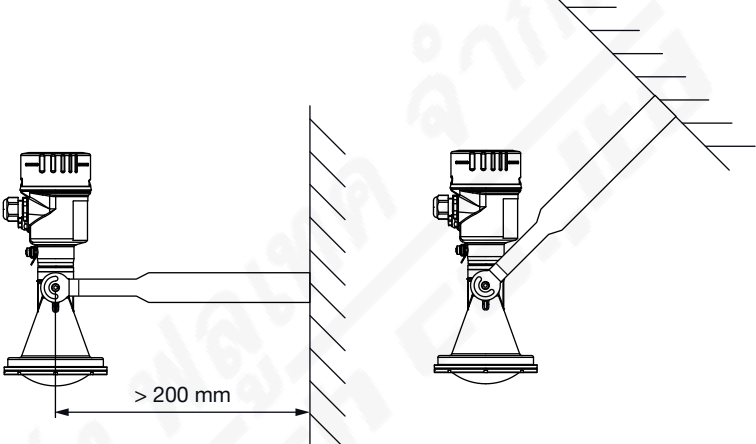Mounting bracket - Ceiling mounting	Mounting bracket - Wall mounting
<p>The instrument is normally mounted vertically with a bracket on the ceiling. This allows the sensor to swivel up to 180° for optimal alignment and rotate for optimal connection.</p> 	<p>Alternatively, the bracket can be mounted horizontally or diagonally.</p> 

Variant with plastic horn antenna with flange

An adapter flange is available for mounting the device on a socket.

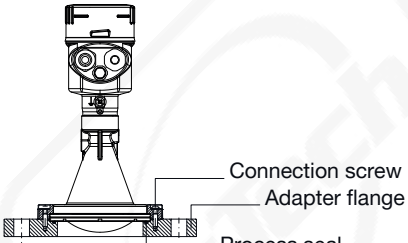Adapter flange
<p>The adapter flange is available from DN 100. It is permanently connected with the radar sensor and sealed.</p> 

DTS 1000604793 EN Version: A Status: RL (released | freigegeben | validé) printed: 24.01.2024


7. Product operation

7.1. Measuring principle

The radar measuring device for the measurement of liquid or bulk solids levels consists of a housing with electronics and a process connection with antenna. The antenna of the radar sensor emits a continuous radar signal. This is reflected by the liquid or bulk solids surface and received by the antenna as an echo. Radar waves propagate at the speed of light. The frequency difference between the transmitted and received signal is determined by special algorithms in the sensor electronics. The filling level is calculated and converted into a corresponding output signal and transmitted as a measured value.

The measuring range of the radar level measuring device Type 8140 begins physically at the end of the antenna. However, the min./max. adjustment begins at the reference plane. The reference plane is different depending on the sensor variant.

- Plastic horn antenna: the reference plane is the sealing surface on the lower edge
- Thread with integrated horn antenna: the reference plane is the sealing surface at the bottom of the hexagon
- Flange with encapsulated antenna system: the reference plane is the lower edge of the flange plating
- Hygiene connection with encapsulated antenna: the reference plane is the highest contact point between sensor process fitting and welded socket

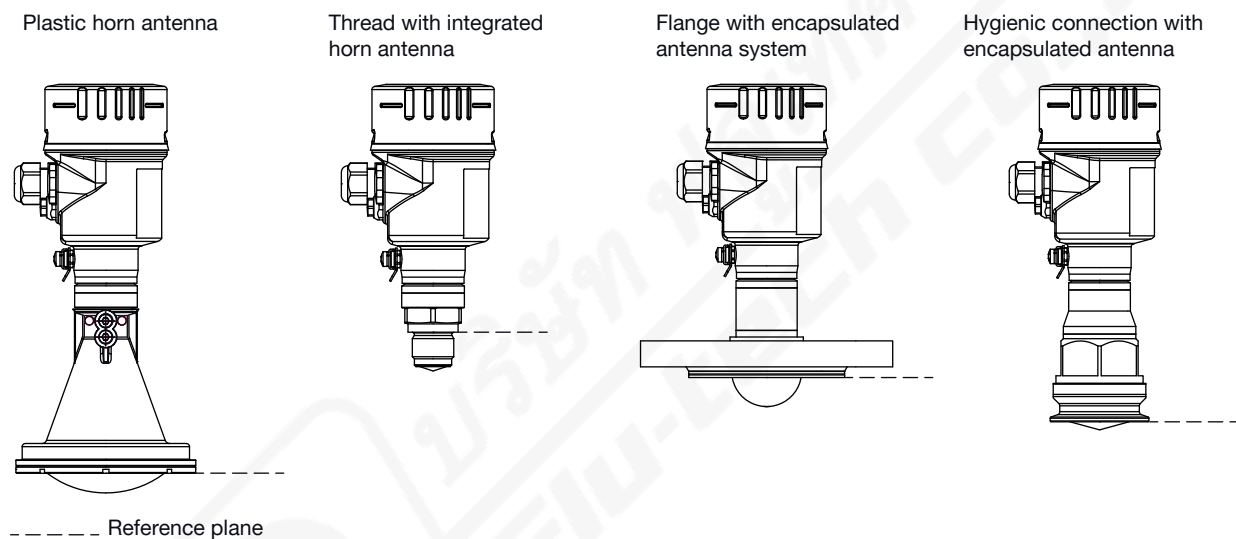

7.2. Product operation notes

Operating techniques

The measuring device can be adjusted with the display/configuration module with Bluetooth or the “Wireless Device Configuration” App

The entered parameters are generally saved in the measuring device Type 8140.

Set up with display/configuration module

Display/configuration module	Description
	<p>The display/configuration module can be inserted into the measuring device and removed again at any time. It is not necessary to interrupt the power supply. The measuring device is adjusted via the four keys of the display/configuration module or via the “Wireless Device Configurator” on Smartphones/ tablets/PC/Notebooks and via Bluetooth.</p>

DTS 1000604793 EN Version: A Status: RL (released | freigegeben | validé) printed: 24.01.2024

8. Product accessories

Note:


The accessories for the variant with plastic horn antenna must be ordered separately, see chapter “9.4. Ordering chart accessories” on page 17.

Accessory	Description
	<p>Mounting bracket 300 mm</p>
	<p>Adapter flange DN 100 PN 16 FKM / PPH</p>
	<p>Adapter flange ASME (ANSI B16.5) 4" 150PSI FKM / PPH</p>

DTS 1000604793 EN Version: A Status: RL (released | freigegeben | validé) printed: 24.01.2024

9. Ordering information

9.1. Bürkert eShop




Bürkert eShop – Easy ordering and quick delivery

You want to find your desired Bürkert product or spare part quickly and order directly? Our online shop is available for you 24/7. Sign up and enjoy all the benefits.

[Order online now](#)

9.2. Bürkert product filter



Bürkert product filter – Get quickly to the right product

You want to select products comfortably based on your technical requirements? Use the Bürkert product filter and find suitable articles for your application quickly and easily.

[Try out our product filter](#)

9.3. Ordering chart

Note:




The following variants are supplied with display/configuration module.

Description	Operating voltage	Process connection	Output	Electrical connection	Article no.
Plastic horn antenna	12...35 V DC	Mounting bracket, 170 mm	4...20 mA/HART (2 wires)	Cable gland M20 x 1.5	574925
Thread with integrated antenna	12...35 V DC	G 3/4, PN 40	4...20 mA/HART (2 wires)		574926
		NPT 3/4, PN 40			574927
		G 1 1/2, PN 40			574928
		NPT 1 1/2, PN 40			574929
		G 1 1/2, PN 3			574930
Flange with encapsulated antenna system	12...35 V DC	DN 50 EN1092-1/DIN2501, 40 bar	4...20 mA/HART (2 wires)		574931
		2" ASME B16.5 150 RF		574932	
Hygienic connection with encapsulated antenna system	12...35 V DC	Clamp 2"	4...20 mA/HART (2 wires)	574933	
				574934	

Further variants on request	
<p>Material e.g. FFKM, PFA</p>	<p>Pressure e.g. 1...6 bar, 1...10 bar</p>
<p>Process connection e.g. compression flange, adapter flange DN 150, ANSI, JIS, clamp 3"</p>	<p>Additional Without display</p>
<p>Temperature e.g. -40...+250 °C, -40...+450 °C with metallic horn antenna</p>	<p>Approval ATEX/IECEx-Certification</p>

DTS 1000604793 EN Version: A Status: RL (released | freigegeben | validé) printed: 24.01.2024

9.4. Ordering chart accessories

Description	Article no.
Set with two adaptors M20 × 1.5 /NPT ½", two neoprene flat seals for cable gland or plug and two screw plugs M20 × 1.5	551782 
Mounting bracket, 300 mm	559839 
Adapter flange DN 100 PN 16 FKM / PPH	560437 
Adapter flange ASME (ANSI B16.5) 4" 150PSI FKM / PPH	560436 