




Clamp On Ultrasonic Flow Meter

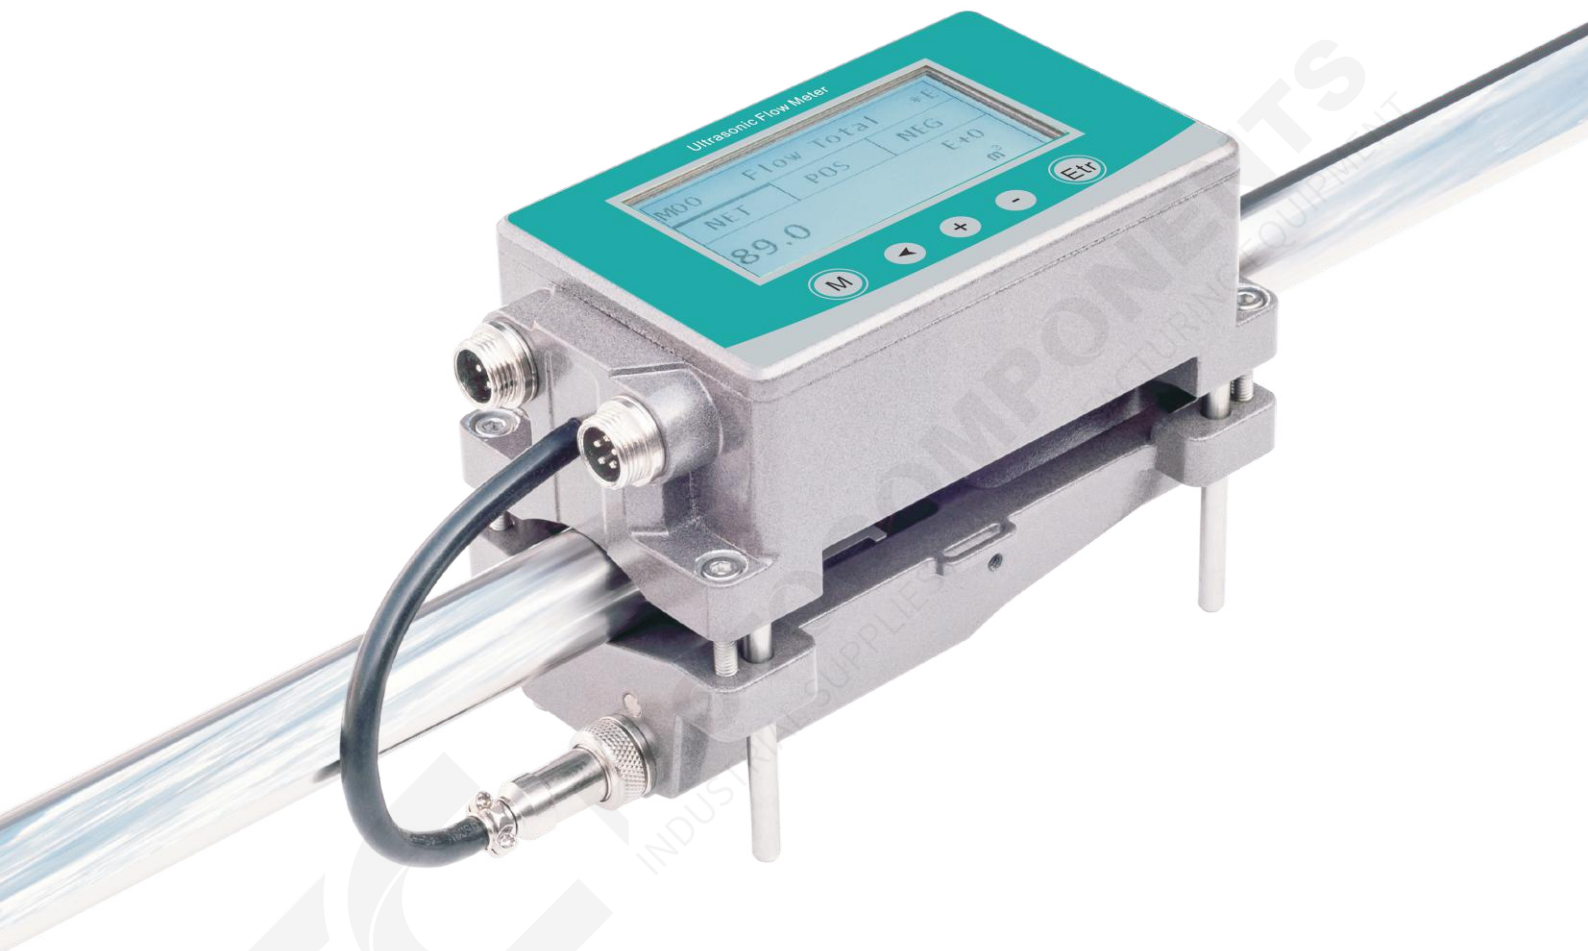

บริษัท แฟคโต คอมโพเนนส์ จำกัด | FACTO COMPONENTS CO., LTD.

845/3-4 ชั้น 3 ถ.เทพารักษ์ ต.เทพารักษ์ อ.เมือง จ.สมุทรปราการ 10270

TEL. 02-384-5701, 02-753-3652 | LINE OA: @134ovdbx | Website : www.factocomponents.co.th | Email : info@factocomponents.co.th



Product Features

Easily and friendly for installation and operation. It only takes a few minutes, from the start of installation to using the flow meter.

QT811 adopts a new external clamp design, which could get the flow rate without touch the measurement medium. Compared with other traditional flow meter, this could avoid pressure loss or media contamination problems.

As the advantage of a clamp on flow meter, no need to cut off the pipe or long time stop the equipment, save the cost of time and labor costs.






A variety of modes are available for setting and flexibility. One set is universal for all pipe size in the measuring range, and suitable for many kinds of metal and resin pipes.

256*128 LCD display. Display a variety of information.

It is optional to become an ultrasonic cooling (heat) meter/ btu meter/ energy meter to realize the monitoring and measurement of energy.




Suitable for various liquids and compatible with various pipeline materials and sizes:

Applicable fluid	 Water	 Oil	 Chemical	
<p>Metal pipe stainless steel, carbon steel, copper</p>  Stainless steel	 Carbon steel	 Copper	<p>Resin pipe PVC, Other</p>  PVC	 Other

DN15~DN65
(Inner diameter 12mm~ Inner diameter 65mm)



Compatible pipe
line size

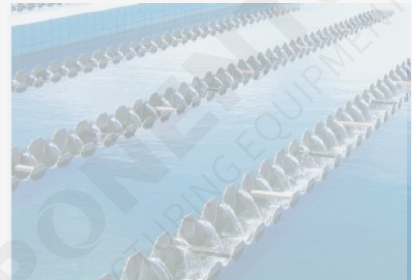


Provide many aspects of help for different flow measurement application requirements:



Site display

Monitor the flow rate reading directly on the device.

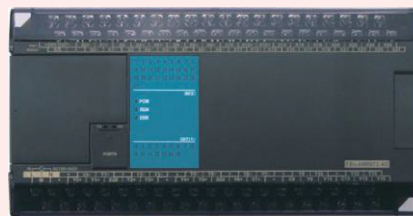

Remote monitoring

With the help of output, could send the information to PLC, central control room and etc.



Data analysis








Record the data to improve efficiency.

Specification


Pipe material	Metal /PVC, PP or PVDF rigid plastic pipe
Liquid type	Water/other liquid (Single liquid medium without solid particles or impurities)
Temperature range	0-75°C (No freezing on the surface)
Low velocity cut off value (Default by factory)	0.1m/s
Display	256*128, LCD
Response time	0.5~60s
Accuracy	±1%
Data Storage period	300 ms
Memory for data backup	EEPROM (Data storage: over 10 years, data read/write frequency: over 1 million times)
Power and IO connection	M12 type aviation plug
Output	4-20mA
Communication	Modbus RS485
(Options for output)	OCT (pulse output)/ One relay alarm (please contact the factory)
Power supply	10-24V VDC
Electric power	< 3W
Protective circuit	Power reverse connection protection, Power surge protection, Output short circuit protection, Output surge protection
Enclosure protection class	IP65
Environment temperature	-10°C to 60°C (No freezing)
Relative humidity	35 to 85% RH (No condensation)
Vibration resistance	10~55Hz double amplitude 1.5 mm, 2 hours in each XYZ axis
Impact resistant	100 m/s ² 16 ms pulse, 1000 times each for X, Y and Z axis
Main material	Aluminum, Industrial Plastics
cable length	2m(standard), PT1000 sensor standard cable length is 9m

Flow Range

Notice: The minimum measurable pipe size is the inner diameter $\geq 12\text{mm}$

Pipe size (DN)	Upper flow value (L/min)
15	60 L/m 
20	100 L/m 
25	200 L/m 
32	300 L/m 
40	400 L/m 
50	600 L/m 
65	1000 L/m 

Size Drawing (Unit: mm)

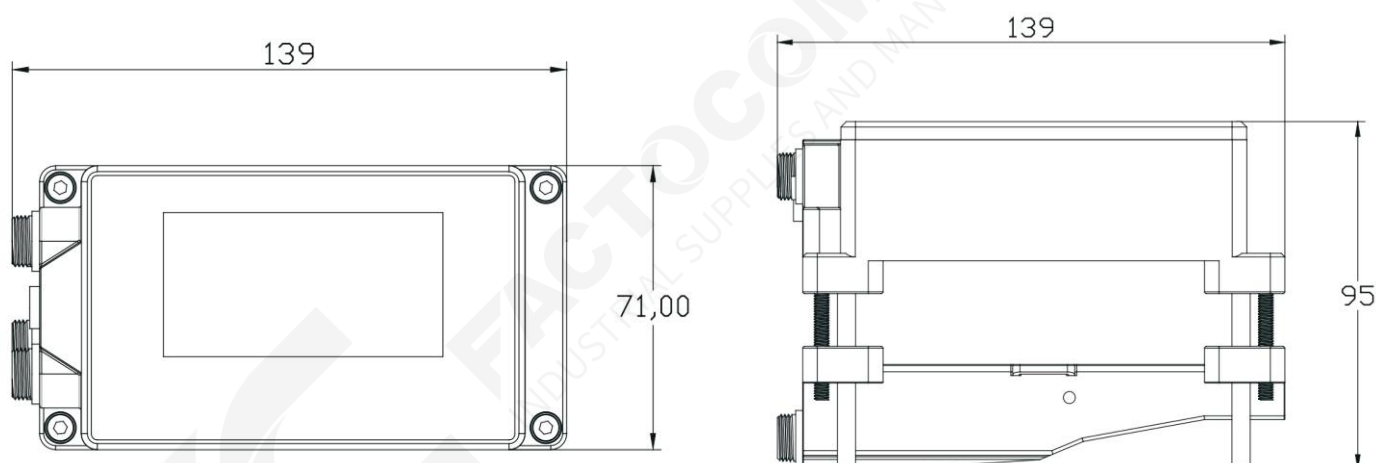

Parts



Ultrasonic Flow Meter



Signal Cable



Power Supply Cable



PT1000 Temperature Sensor



Screw



Couplant

Ultrasonic Energy /BTU Meter

