

TURBIDITY SENSOR

PTU8011 SERIES

Datasheet



Datasheet

Turbidity Sensor SUP-PTU-8011

SUP-PTU-8011 turbidity sensor based on the infrared absorption scattered light method and combined with the application of ISO7027 method, can guarantee the continuous and accurate detection of turbidity. Based on ISO7027, infrared double scattering light technology will not be affected by chroma for the measurement of turbidity value. According to the usage environment, self-cleaning function can be equipped with. It assures the stability of data and reliability of performance; with the built-in self-diagnosis function, it can make sure the accurate data be delivered; besides, the installation and calibration is quite simple.

Applications

- Wastewater
- Tap water
- Water Station
- Surface water
- Industry water
- Environmental monitoring

Features

- Measure range: 0.01~4000NTU
- Accuracy: Less than $\pm 2\%$ or $\pm 0.1\text{NTU}$ of the measured value (Take the maximum)
- Pressure range: $\leq 0.4\text{MPa}$
- Working temperature: $0\sim 45^{\circ}\text{C}$ (No ice)
- RS485 communication



Turbidity Sensor

TURBIDITY SENSOR PTU8011 SERIES



Parameters

Specification	Detailed information
Measurement range	(0.01 to 4000) NTU
Measurement accuracy	Less than $\pm 2\%$ of measured value or ± 0.1 NTU, take the maximum
Repeatability	$\pm 2\%$
Resolution	(0.01~0.1)NTU, depending on the range
Pressure range	≤ 0.4 Mpa
Flow rate	≤ 2.5 m/s, 8.2 ft/s
Main materials	Body: SUS316L/Titanium/PVC; top and bottom cover: POM, cable: PUR
Power supply	12VDC
Output	RS485, MODBUS-RTU
Operating temperature	(0~45) $^{\circ}$ C (No Icing)
Weight	1.65kg
Ingress Protection	IP68/ NEMA6P
Cable length	10m cable (standard), 100m (extended)

Installation

Connections of Sensor


Core Number	1	2	3	4	5
Wire of Sensor	Brown	Black	Blue	White	Yellow + Green
Signal	+12VDC	AGND	RS485 A	RS485 B	Earth Line

TURBIDITY SENSOR PTU8011 SERIES

Installation

■ Classic Poolside Fixed Installation

CBJD-03

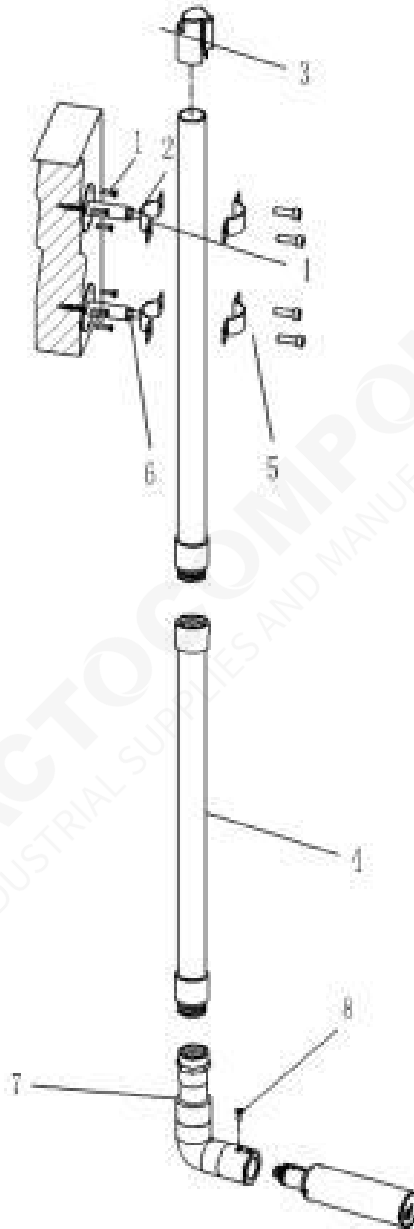


No.	Parts
1	Expansion screws
2	Installation of pipes
3	Installation see blockage
4	Installing the pipe
5	Hexagon socket screws
6	Flange nuts
7	Sensor adaptor
8	Cross bolt M6*12

TURBIDITY SENSOR PTU8011 SERIES

■ Quick Release Poolside Fixed Installation


CBZJ-03

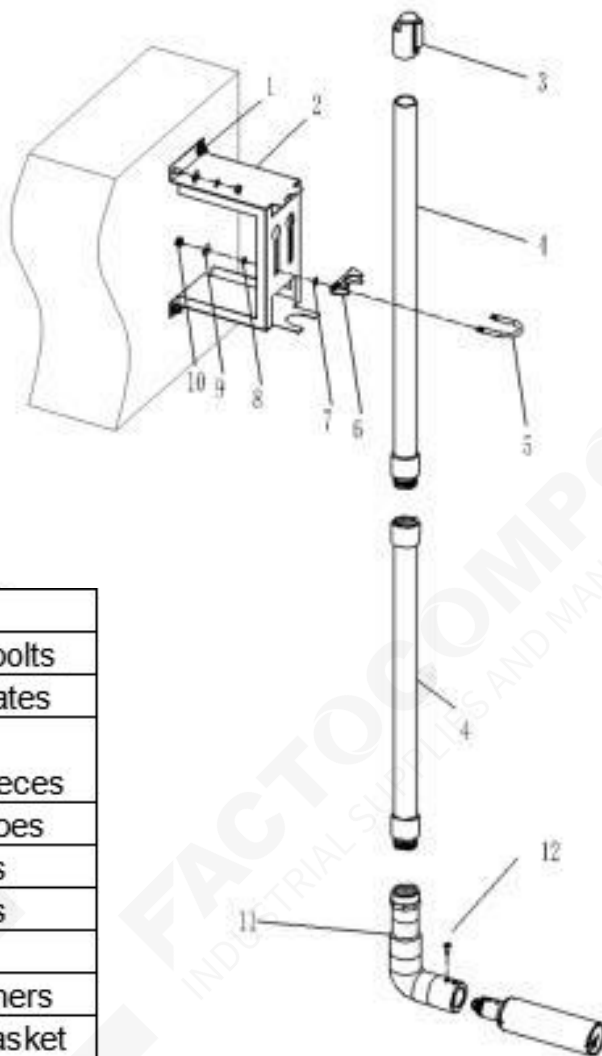

No.	Parts
1	Expansion bolts
2	Mounting plates
3	Clogging of mounting pieces
4	Mounting tubes
5	Pipe clamps
6	Pipe clamps
7	Flat gasket
8	Spring washers
9	Large flat gasket
10	Flange nuts
11	Sensor adapters
12	Cross bolt M6*12

TURBIDITY SENSOR PTU8011 SERIES


■ Railing Type Fixed Installation

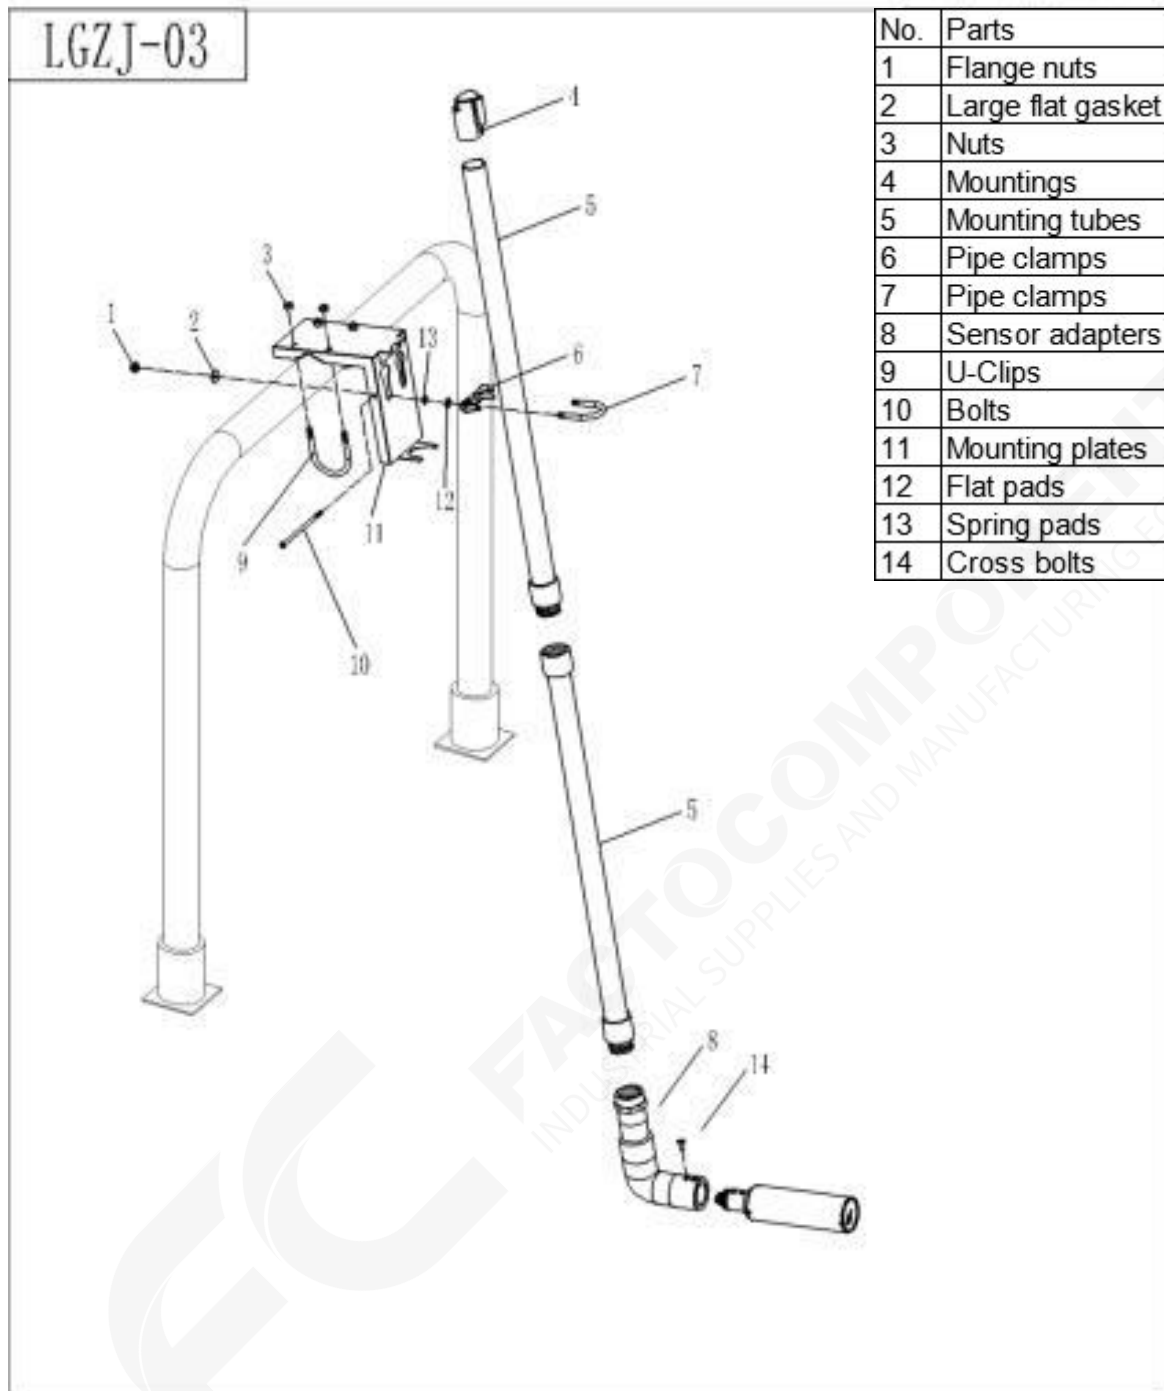


TURBIDITY SENSOR PTU8011 SERIES

Dimension

■ With Scraper Sensor

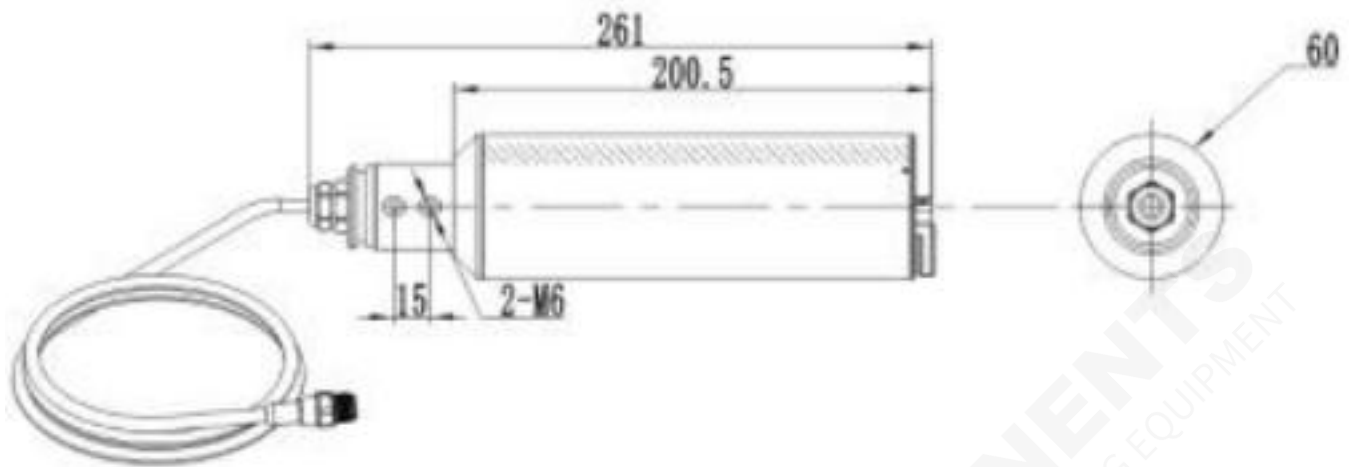

■ Without Scraper Sensor

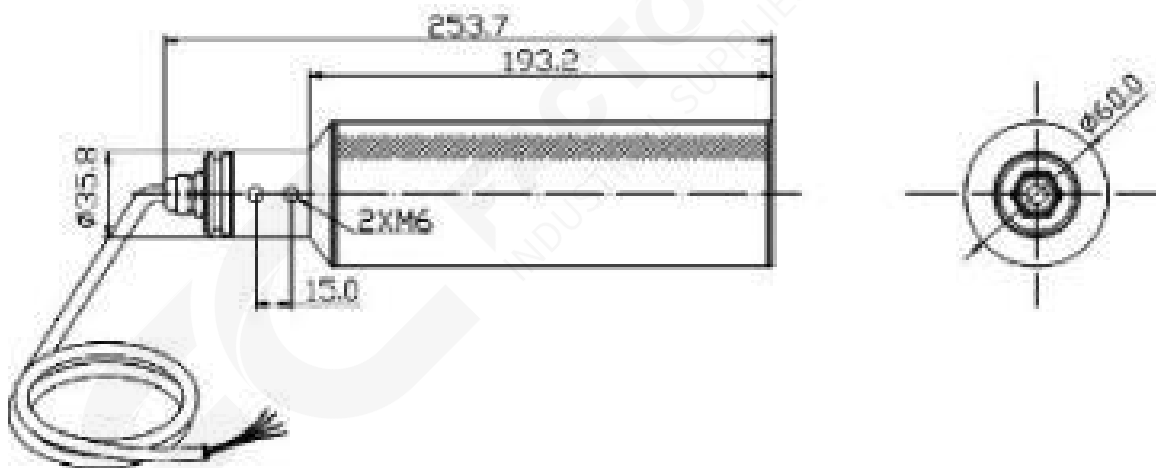

TURBIDITY SENSOR PTU8011 SERIES



Dimension

SUP-PTU8011-HM1-ES0-CS10										Description
SUP-PTU8011	-	-	-	-	-	-	-	-	-	
Serial Number PTU8011										Measuring range: (0.01~4000)NTU Temperature range: (0-45)°C Pressure resistance: 0.2MPa
Shell material		HM1								Stainless steel housing
		HM2								Titanium shell
Electrode scraper			ES0							Without electrode scraper
			ES1							With electrode scraper
Cable length				CS10						10 cables
				CSXX						XXm cable