

Two piece air service unit FROX

Technical details

Temperature range	-10°C ... +60°C
Input range	1.5 ... 16 bar
Mounting	vertically, drain at bottom
Medium	compressed air according to ISO 8573-1:2010, neutral gases
Materials	Body: zinc diecasting, bowl: PC, seals: NBR, inner parts: zinc coated steel, stainless steel and brass

Combination of filter, regulator and lubricator.
Locking: rotary lock possible.



Order code

FROX-**-**-5-****			
Series	←	→	Versions
Connection / Size	←		Digit 1 Bowl
14 G1/4 / X1			1 PC
37 G3/8 / X1			3 metal bowl with sight glass
12 G1/2 / X2			4 PC with guard
34 G3/4 / X2			Digit 2 Drain
Output range	←		2 semi-automatic (standard)
03 0.2 ... 3 bar			3 automatic, NO (open at 0 bar input pressure)
06 0.5 ... 6 bar			4 automatic, NC (closed at 0 bar input pressure)
10 0.5 ... 10 bar (standard)			Digit 3 Gauge, flow direction
Filter element	←		0 without gauge, flow from left to right
5 5 µm			1 without gauge, flow from right to left
			2 with gauge, flow from left to right (standard)
			3 with gauge, flow from right to left
			Digit 4
			1 standard
			2 key lockable


Two piece air service unit FROX

Technical data


Model-no.:	FROX-14-...	FROX-37-...	FROX-12-...	FROX-34-...
Connection	G1/4	G3/8	G1/2	G3/4
Size	X1	X1	X2	X2
Flow (l/min)	1200	1200	5250	5250
Lubricator operating limit (l/min)	75	75	170	170
Bowl volume (cm ³)	25	25	50	50
Bowl volume lubricator (cm ³)	50	50	125	125
Weight (kg)	0.69	0.67	1.68	1.60

Flow characteristic

FROX-14, FROX-37

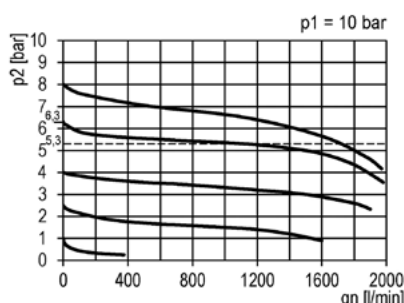

FROX-12, FROX-34

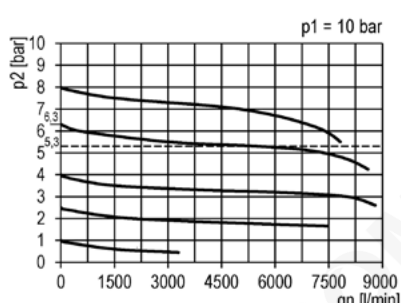

Accessories

Mounting brackets WK



Mounting brackets WX



Coupling kits KPX




Mounting nut RM




Details: see page 04

Dimensions

Size X1

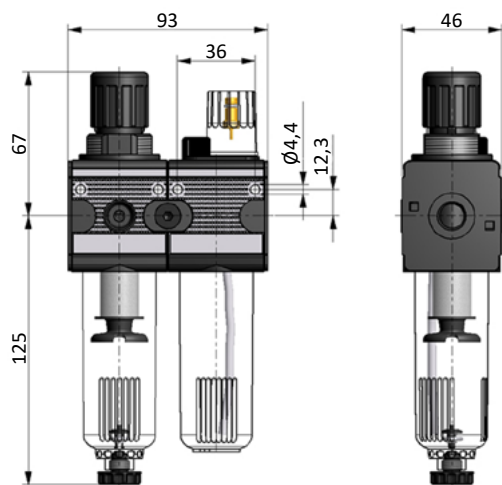

Size X2

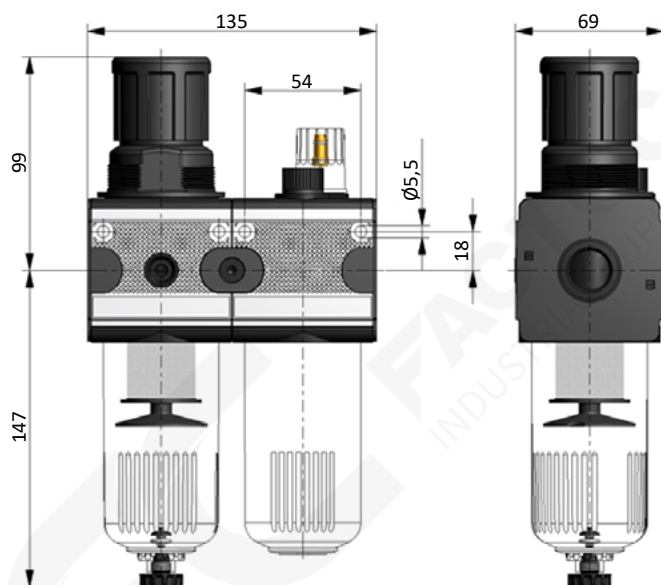


Fastening elements


Mounting brackets WK

Mounting brackets made of zinc coated steel. Assembling with mounting nut (not included).

WK-30

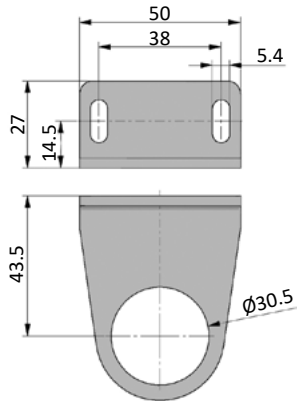


WK-50

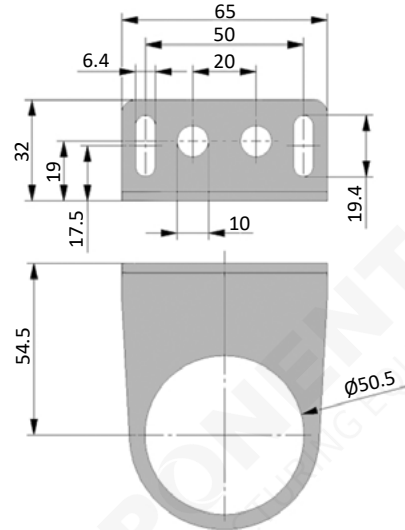


Mounting brackets WX

Mounting brackets made of zinc coated steel.

WX-11

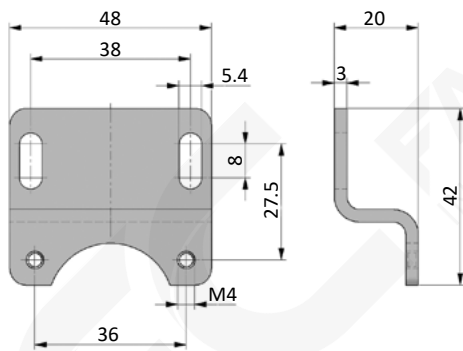


WX-33

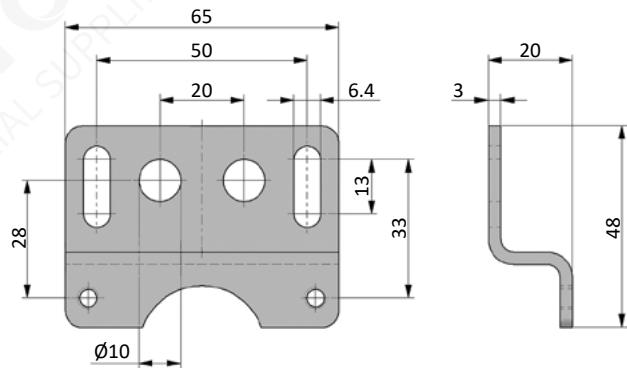


Coupling kits KPX

KPX-11



KPX-33



Technical details

Temperature range	-20°C ... +60°C
Accuracy class	2.5 according to EN 837-1
Application	Constant load: 3/4 x scale value Alternating load: 2/3 x scale value
Materials	Body: steel or ABS, black Window: clear Dial: white with stop pin Scale black (bar) and blue (psi)
Temperature drift	± 0.4% / 10 K if deviation from normal temperature (+ 20°C)



Bourdon tube pressure gauge (EN 837-1), pressure connection rear.



Order code

Series		Connection	
40 40 mm		18 1/8	
50 50 mm		14 1/4	
63 63 mm			
Range			
06 0 ... 6 bar			
10 0 ... 10 bar			
16 0 ... 16 bar			

Technical data

Model-no.:	MXA-50-06-14		MXA-50-10-14		MXA-50-16-14	
Connection	G1/4		R1/4		R1/4	
Standard for series	-		-		X1. X2. Y1. Y2	
Range	0 ... 6 bar		0 ... 10 bar		0 ... 16 bar	
Weight (kg)	0.071		0.071		0.071	
Model-no.:	MXA-40-06-18	MXA-40-10-18	MXA-40-16-18	MXA-63-06-14	MXA-63-10-14	MXA-63-16-14
Connection	G1/8	R1/8	R1/8	G1/4	G1/4	G1/4
Standard for series	-	-	K. RD	-	-	Y3
Range	0 ... 6 bar	0 ... 10 bar	0 ... 16 bar	0 ... 6 bar	0 ... 10 bar	0 ... 16 bar
Weight (kg)	0.071	0.071	0.071	0.080	0.080	0.080