



## 27 SERIES CLASSIC VALVES

---



## PRODUCT CATALOG

# Inline Poppet Valves 27 Series

## Product Overview

### Directional Control Function

Directional control valves function is to control the direction of flow in the pneumatic circuit. Directional control valves are able to control the way the air passes. These valves can regulate the airflow being capable to stop fluid flow, allow fluid flow, and change the direction of fluid flow. These three functions usually operate in combination.

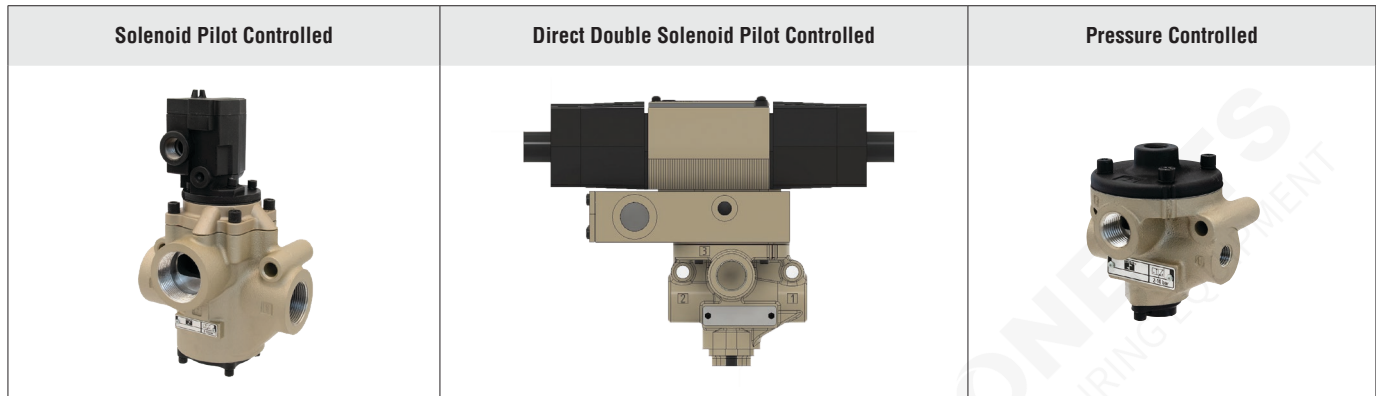


Illustration examples.

### VALVE FEATURES

Poppet Design	Poppet construction for high dirt tolerance
Mounting Options	Can be mounted close to actuator, reducing length of pipe to be pressurized/exhausted on each cycle
Pilot Supply	Internal or external
High Velocity	Near zero leakage
Positive Sealing	No sliding action to prevent damage and wear
Reliability	Consistent response times over the life of the valve

Explosion-Proof solenoid pilot valves available, see valves for Hazardous Locations.



Actuation	Available Inlet Port Sizes									Functions			Maximum Flow C <sub>v</sub> (NI/min)	Page
	1/4	3/8	1/2	3/4	1	1-1/4	1-1/2	2	2-1/2	2/2	3/2	4/2		
Solenoid Pilot Controlled	●	●	●	●	●	●	●	●	●	●	●		71 (70000)	3 – 9
Direct Double Solenoid Controlled	●	●	●	●	●	●	●					●	34 (33000)	10 – 13
Pressure Controlled	●	●	●	●	●	●	●			●	●	●	71 (70000)	14 – 19
Accessories														20 – 21

## STANDARD SPECIFICATIONS

GENERAL	Function		2/2 Valve	Normally Closed
				Normally Open
			3/2 Valve	Normally Closed
				Normally Open
			4/2 Valve	
	Construction Design		Poppet	
	Actuation		Electrical	Solenoid Pilot Controlled
				Direct Double Solenoid Pilot Controlled
			Pneumatic	Pressure Controlled
	Mounting	Type	Inline	
		Orientation	Any, preferably vertical	
	Connection		Threaded Port	NPT
				G
Manual Override (Solenoid Controlled valves)		Flush; rubber, non-locking		

OPERATING CONDITIONS	Temperature	Solenoid Pilot Controlled	Ambient	40° to 120°F (4° to 50°C)	
			Media	40° to 175°F (4° to 80°C)	
		Pressure Controlled	Ambient	40° to 175°F (4° to 80°C)	
			Media		
	Flow Media		Filtered air		
	Operating Pressure		Body Size	3/8 through 1-1/4	15 to 150 psig (1 to 10 bar)
				2	30 to 150 psig (2 to 10 bar)
	Pilot Supply Pressure		Internal	Must meet minimum operating pressure	
			External	Must be equal to or greater than inlet pressure, and meet minimum operating pressure	




ELECTRICAL DATA FOR SOLENOID PILOT VALVES	Solenoids	Current Flow	Operating Voltage	Power Consumption (each solenoid)
		DC	24 volts	14 watts
		AC	110-120 volts, 50/60 Hz	87 VA inrush, 30 VA holding
			230-240 volts, 60 Hz	
		Rated for continuous duty		

CONSTRUCTION MATERIAL	Valve Body	Cast Aluminum
	Poppet	Acetal and Stainless Steel
	Seals	Buna-N

SAFETY DATA	Safety Integrity Level (SIL)	Certified by TÜV Rheinland in accordance to IEC 61508 and IEC 61511 safety integrity level 2 (SIL 2) and EN ISO 13849-1, PL c (with application specific diagnosis) in singular application with HFT = 0 and SIL 3 and PL e in redundant application with HFT≥1, for details see certificate.
-------------	------------------------------	---

**IMPORTANT NOTE:** Please read carefully and thoroughly all of the CAUTIONS, WARNINGS on the inside back cover.

## PRODUCT CREDENTIALS

<b>Safety Integrity Level</b> Per IEC 2061:2001  	<b>Declaration of Conformity</b>   	<b>Certificate of Compliance</b>  
---	--	---

# Ordering Information

## 2/2 Solenoid Pilot Controlled Valves

### MODEL NUMBER CONFIGURATOR

### 2-Way 2-Position Valves

Port Thread		27	7	1	B	2001	W
NPT							
Leave Blank							
G	D						
Series							
Actuation							
Solenoid Pilot							
Valve Function							
2/2 Normally Closed	1						
2/2 Normally Open	2						
Revision Level							

Body Size	Port Size In-Out	Internal Pilot Supply	External Pilot Supply
3/8	1/4	2001	2051
	3/8	3001	3051
	1/2	4011	4061
3/4	1/2	4001	4051
	3/4	5001	5051
	1	6011	6061
1-1/4	1	6001	6051
	1-1/4	7001	7051
	1-1/2	8011	8061
2	1-1/2	8001	8051
	2	9001	9051
	2-1/2	9011	9061

Current	Voltage*	
DC	24 V	W
AC	110-120 V, 50/60 Hz	Z
	230-250 V, 60 Hz	Y

\* For other voltages consult ROSS.

Model Number examples: 2771B2001W, D2771B9061Z.

Size		Flow C <sub>v</sub> (NI/min)		Average Response Constants*			≈ Weight lb (kg)
Body	Port 1, 2	Normally Closed (NC)	Normally Open (NO)	M	F		
		1-2	1-2		NC	NO	
3/8	1/4	1.8 (1800)	1.8 (1800)	10	0.91	0.91	2.5 (1.2)
	3/8	3.2 (3100)	2.9 (2800)	10	0.70	0.76	
	1/2	3.9 (3800)	3.4 (3300)	10	0.64	0.72	
3/4	1/2	7.2 (7100)	6.5 (6400)	14	0.37	0.43	3.3 (1.5)
	3/4	9.1 (9000)	8.2 (8100)	14	0.34	0.39	
	1	9.9 (9700)	8.2 (8100)	14	0.34	0.37	
1-1/4	1	21 (21000)	21 (21000)	26	0.17	0.17	7.0 (3.2)
	1-1/4	30 (31000)	22 (22000)	26	0.15	0.19	
	1-1/2	32 (31000)	24 (24000)	26	0.15	0.18	
2	1-1/2	46 (45000)	46 (45000)	41	0.09	0.09	15.5 (6.9)
	2	59 (58000)	58 (57000)	41	0.07	0.07	
	2-1/2	66 (65000)	60 (59000)	41	0.07	0.06	

\* **Valve Response Time** – Response Time (msec) = M + (F • V). This is the average time required to fill a volume V (cubic inches) to 90% of supply pressure or to exhaust it to 10% of supply pressure. M and F values are shown above.

Valve Schematic		Solenoid Pilot		Manual Override	
Normally Closed	Normally Open	1/8" Pilot Exhaust Port	Y-3	1/2 Electrical Conduit Port	X-1
		Port 2 (Outlet)	Port 1 (Inlet)		




## 2/2 Solenoid Pilot Controlled Valves


### DIMENSIONS

Inches (mm)


Body Size 3/8

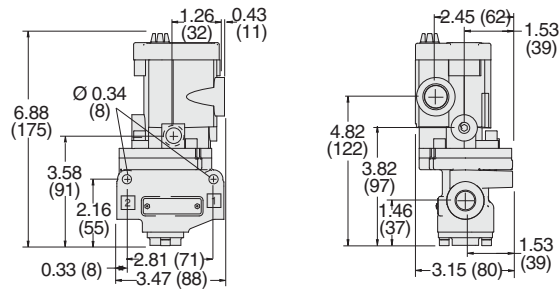


Body Size 3/4

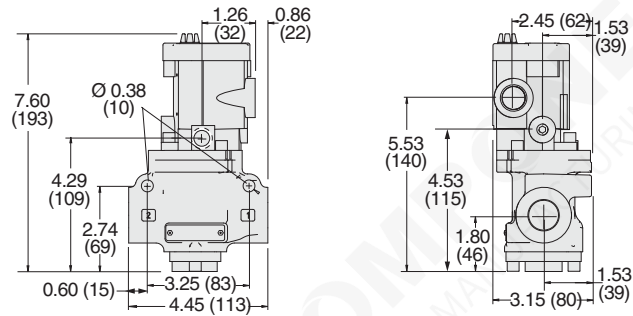

Body Size 1-1/4

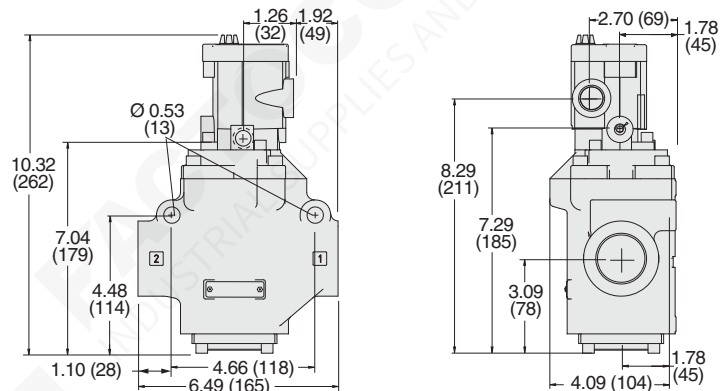

Body Size 2

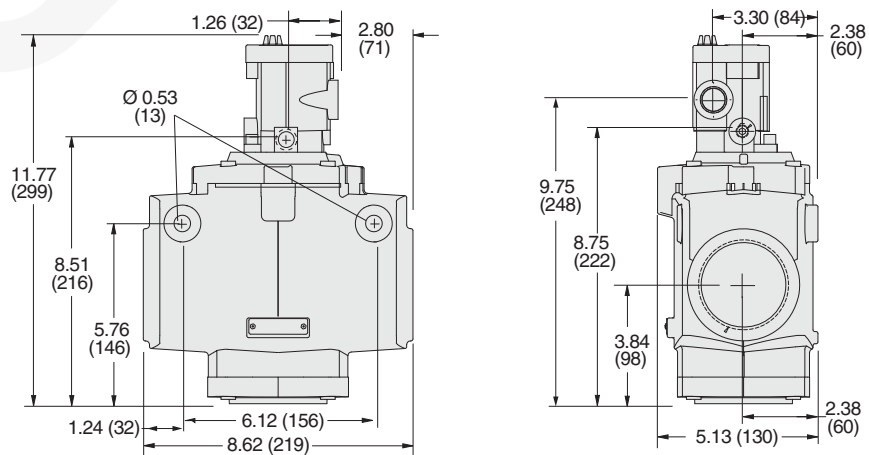

Downloadable CAD models available.

# Ordering Information

## 3/2 Solenoid Pilot Controlled Valves

### MODEL NUMBER CONFIGURATOR

### 3-Way 2-Position Valves

Port Thread		27	7	3	B	2001	W
NPT							
Leave Blank							
G	D						
Series							
Actuation							
Solenoid Pilot							
Valve Function							
3/2 Normally Closed		3					
3/2 Normally Open		4					
Revision Level							

Body Size	Port Size		Internal Pilot Supply	External Pilot Supply
	In-Out	Exhaust		
3/8	1/4	1/2	2001	2051
	3/8	1/2	3001	3051
	1/2	1/2	4011	4061
3/4	1/2	1	4001	4051
	3/4	1	5001	5051
	1	1	6011	6061
1-1/4	1	1-1/2	6001	6051
	1-1/4	1-1/2	7001	7051
	1-1/2	1-1/2	8011	8061
2	1-1/2	2-1/2	8001	8051
	2	2-1/2	9001	9051
	2-1/2	2-1/2	9011	9061

Current	Voltage *	
DC	24 V	W
AC	110-120 V, 50/60 Hz	Z
	230-250 V, 60 Hz	Y

\* For other voltages consult ROSS.

Model Number examples: 2773B2001W, D2773B6061Z.

Size			Flow C <sub>V</sub> (l/min)				Average Response Constants*						≈ Weight lb (kg)
Body	Port 1, 2	Port 3	Normally Closed (NC)		Normally Open (NO)		M	F					
								NC		NO			
			1-2	2-3	1-2	2-3		1-2	2-3	1-2	2-3		
3/8	1/4	1/2	1.9 (1900)	3.3 (3200)	1.7 (1700)	3.0 (3000)	10	0.90	0.80	0.99	0.88	2.5 (1.2)	
	3/8	1/2	2.9 (2800)	4.4 (4300)	2.8 (2800)	3.0 (3000)	10	0.70	0.50	0.90	0.77		
	1/2	1/2	3.8 (3800)	5.0 (4900)	3.0 (3000)	3.0 (3000)	10	0.75	0.50	0.90	0.76		
3/4	1/2	1	6.2 (6100)	9.4 (9300)	6.1 (6000)	8.0 (7900)	11	0.43	0.27	0.46	0.60	3.3 (1.5)	
	3/4	1	8.2 (8100)	10 (9800)	7.7 (7600)	8.0 (7900)	11	0.36	0.26	0.45	0.60		
	1	1	9.1 (9000)	12 (12000)	8.3 (8200)	8.0 (7900)	11	0.34	0.25	0.40	0.59		
1-1/4	1	1-1/2	21 (21000)	27 (27000)	18 (18000)	20 (20000)	28	0.17	0.14	0.20	0.17	7.0 (3.2)	
	1-1/4	1-1/2	29 (29000)	29 (29000)	21 (21000)	22 (22000)	28	0.15	0.15	0.19	0.17		
	1-1/2	1-1/2	30 (30000)	30 (30000)	21 (21000)	25 (25000)	28	0.15	0.15	0.19	0.16		
2	1-1/2	2-1/2	45 (44000)	75 (74000)	45 (44000)	53 (52000)	76	0.05	0.04	0.07	0.04	16.5 (7.4)	
	2	2-1/2	57 (56000)	78 (77000)	55 (54000)	61 (60000)	76	0.05	0.04	0.05	0.04		
	2-1/2	2-1/2	66 (65000)	82 (81000)	61 (60000)	71 (70000)	76	0.05	0.04	0.50	0.04		

\* **Valve Response Time** – Response Time (msec) = M + (F • V). This is the average time required to fill a volume V (cubic inches) to 90% of supply pressure or to exhaust it to 10% of supply pressure. M and F values are shown above.


Valve Schematic		Solenoid Pilot		Manual Override	
Normally Closed	Normally Open				

## 3/2 Solenoid Pilot Controlled Valves


### DIMENSIONS

Inches (mm)


Body Size 3/8

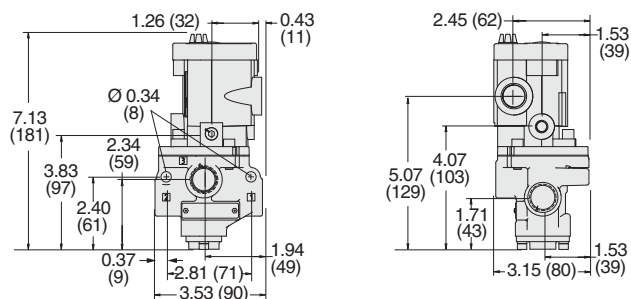


Body Size 3/4

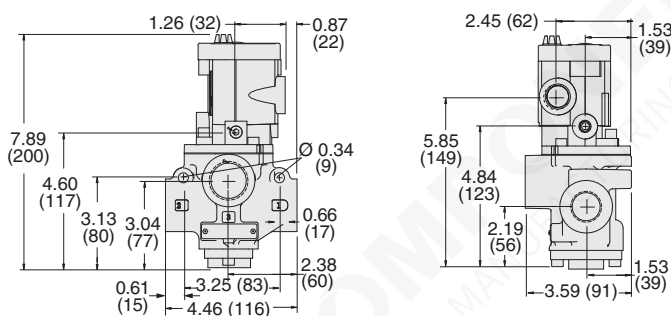

Body Size 1-1/4

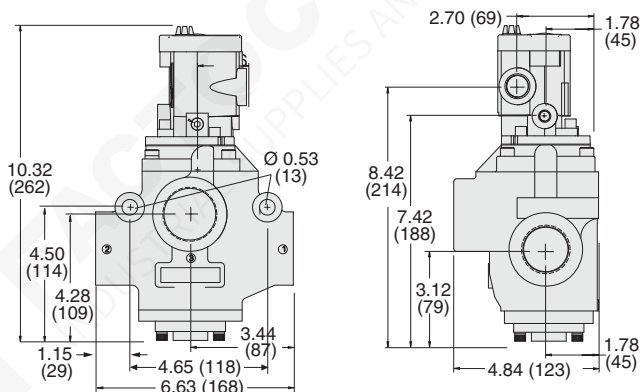

Body Size 2

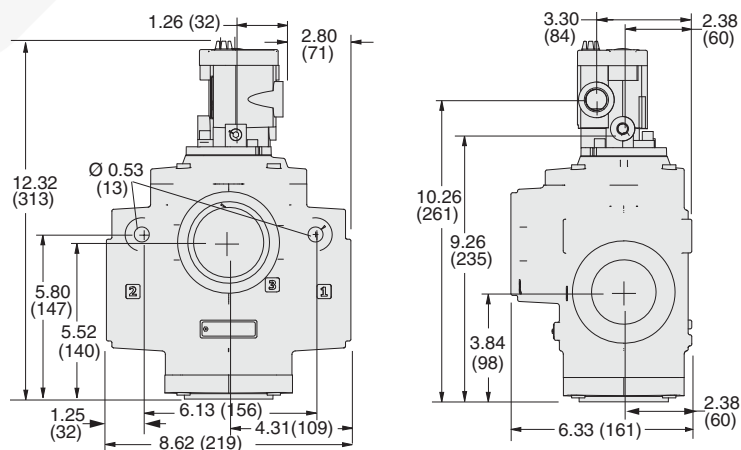

Downloadable CAD models available.

# Ordering Information

## 4/2 Solenoid Pilot Controlled Valves

### MODEL NUMBER CONFIGURATOR

### 4-Way 2-Position Valves

Port Thread		27	7	6	B	2001	W
NPT							
Leave Blank							
G	D						
Series							
Actuation							
Solenoid Pilot							
Valve Function							
4/2							
Revision Level							

Current	Voltage*	
DC	24 V	W
AC	110-120 V, 50/60 Hz	Z
	230-250 V, 60 Hz	Y

\* For other voltages consult ROSS.



Body Size	Port Size		Internal Pilot Supply	External Pilot Supply
	In-Out	Exhaust		
3/8	1/4	1/2	2001	2051
	3/8	1/2	3001	3051
	1/2	1/2	4011	4061
3/4	1/2	1	4001	4051
	3/4	1	5001	5051
	1	1	6011	6061
1-1/4	1	1-1/2	6001	6051
	1-1/4	1-1/2	7001	7051
	1-1/2	1-1/2	8011	8061

Model Number examples: 2776B2001W, D2776B92051Z.

Size			Flow C <sub>v</sub> (NI/min)				Average Response Constants*			≈ Weight lb (kg)
Body	Port 1, 2, 4	Port 3					M	F		
			1-2	2-3	1-4	4-3		1-2, 1-4	4-3, 2-3	
3/8	1/4	1/2	1.7 (1700)	2.3 (2300)	1.8 (1800)	2.8 (2800)	10	0.92	0.92	3.0 (1.4)
	3/8	1/2	2.6 (2600)	3.3 (3200)	2.9 (2900)	3.9 (3800)	10	0.90	0.90	
	1/2	1/2	3.1 (3100)	4.2 (4100)	4.2 (4100)	5.2 (5100)	10	0.89	0.73	
3/4	1/2	1	5.7 (5600)	7.0 (6900)	5.5 (5400)	7.3 (7200)	26	0.50	0.66	5.3 (2.4)
	3/4	1	7.4 (7300)	7.0 (6900)	7.3 (7200)	9.5 (9300)	26	0.36	0.55	
	1	1	7.9 (7800)	8.0 (7900)	8.0 (7900)	11 (11000)	26	0.35	0.50	
1-1/4	1	1-1/2	13 (13000)	21 (21000)	18 (18000)	22 (22000)	79	0.17	0.22	11.3 (5.1)
	1-1/4	1-1/2	16 (16000)	22 (22000)	25 (25000)	26 (26000)	79	0.16	0.18	
	1-1/2	1-1/2	16 (16000)	22 (22000)	26 (26000)	27 (27000)	79	0.15	0.15	

\* **Valve Response Time** – Response Time (msec) = M + (F • V). This is the average time required to fill a volume V (cubic inches) to 90% of supply pressure or to exhaust it to 10% of supply pressure. M and F values are shown above.

#### Valve Schematic

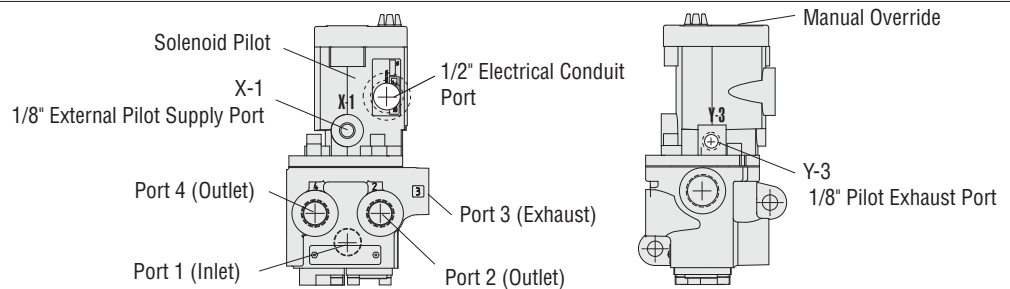


## 4/2 Solenoid Pilot Controlled Valves


### DIMENSIONS

Inches (mm)


Body Size 3/8

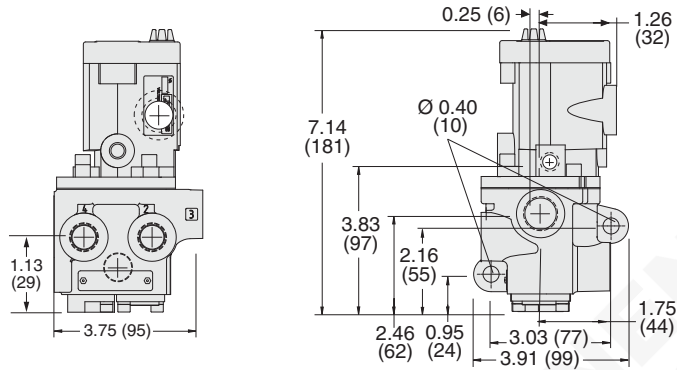

Body Size 3/4

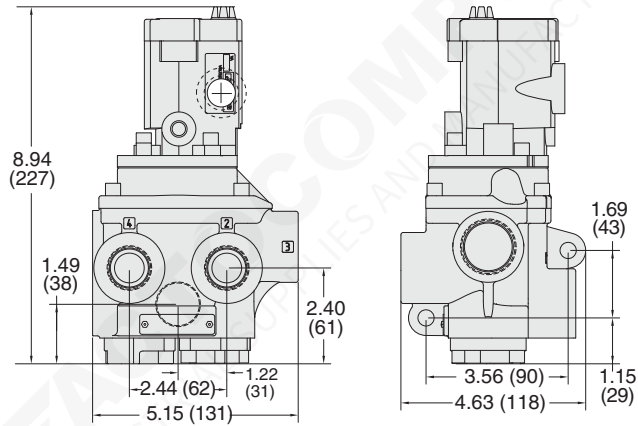

Body Size 1-1/4

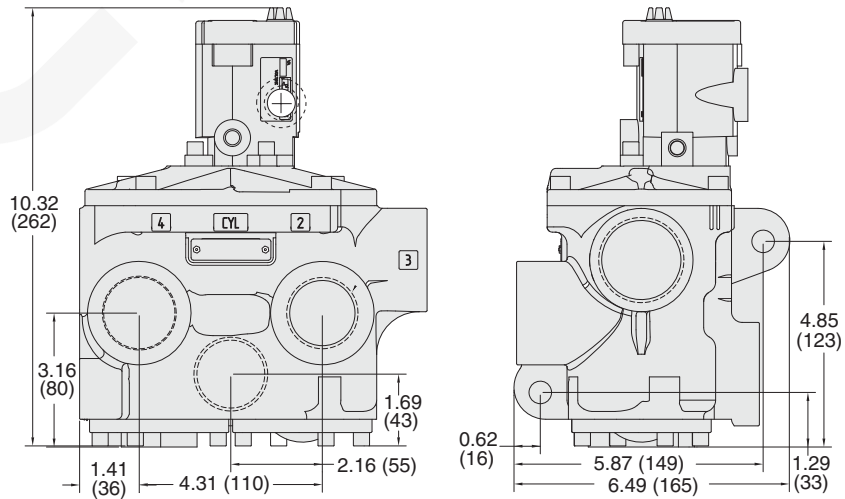

Downloadable CAD models available.

# Ordering Information

## 3/2 Direct Double Solenoid Pilot Controlled Valves

### MODEL NUMBER CONFIGURATOR

### 3-Way 2-Position Valves

Port Thread		27	7	3	B	2003	W
NPT							
Leave Blank							
G	D						
Series							
Actuation							
Direct Solenoid Controlled							
Valve Function							
3/2 Normally Closed							
3/2 Normally Open							
Revision Level							

Body Size	Port Size		Internal Pilot Supply*
	In-Out	Exhaust	
3/8	1/4	1/2	2003
	3/8	1/2	3003
	1/2	1/2	4013
3/4	1/2	1	4003
	3/4	1	5003
	1	1	6013
1-1/4	1	1-1/2	6003
	1-1/4	1-1/2	7003
	1-1/2	1-1/2	8013

Current	Voltage*	
DC	24 V	W
AC	110-120 V, 50/60 Hz	Z
	230-250 V, 60 Hz	Y

\* For other voltages consult ROSS.

\* For models with external pilot supply consult ROSS.

Model Number examples: 2773B2003W, D2773B8003Z.

Size			Flow C <sub>V</sub> (NI/min)				Average Response Constants*				≈ Weight lb (kg)	
Body	Port 1, 2	Port 3	Normally Closed (NC)		Normally Open (NO)		M	F				
								NC		NO		
			1-2	2-3	1-2	2-3		1-2	2-3	1-2		2-3
3/8	1/4	1/2	2.5 (2500)	3.1 (3100)	2.3 (2300)	2.7 (2700)	10	0.90	0.80	0.99	0.88	2.5 (1.2)
	3/8	1/2	3.6 (3500)	5.3 (5200)	2.8 (2800)	3.2 (3100)	10	0.70	0.50	0.90	0.77	
	1/2	1/2	3.3 (3200)	5.3 (5200)	2.8 (2800)	3.2 (3100)	10	0.75	0.50	0.90	0.76	
3/4	1/2	1	6.3 (6200)	9.2 (9100)	6.3 (6200)	8.0 (7900)	11	0.43	0.27	0.46	0.60	3.3 (1.5)
	3/4	1	7.7 (7600)	11 (11000)	6.9 (6800)	7.4 (7300)	11	0.36	0.26	0.45	0.60	
	1	1	8.0 (7900)	12 (12000)	6.8 (6700)	7.5 (7400)	11	0.34	0.25	0.40	0.59	
1-1/4	1	1-1/2	23 (23000)	34 (33000)	17 (17000)	24 (24000)	28	0.17	0.14	0.20	0.17	7.0 (3.2)
	1-1/4	1-1/2	30 (30000)	32 (31000)	19 (19000)	24 (24000)	28	0.15	0.15	0.19	0.17	
	1-1/2	1-1/2	30 (30000)	31 (31000)	19 (19000)	23 (23000)	28	0.15	0.15	0.19	0.16	

\* **Valve Response Time** – Response Time (msec) = M + (F • V). This is the average time required to fill a volume V (cubic inches) to 90% of supply pressure or to exhaust it to 10% of supply pressure. M and F values are shown above.

### Valve Schematic

#### Normally Closed


#### Normally Open

## 3/2 Direct Double Solenoid Controlled Valves


### DIMENSIONS

Inches (mm)


Body Size 3/8

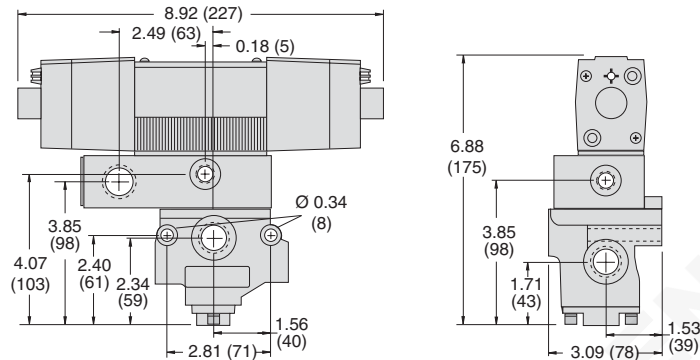

Body Size 3/4

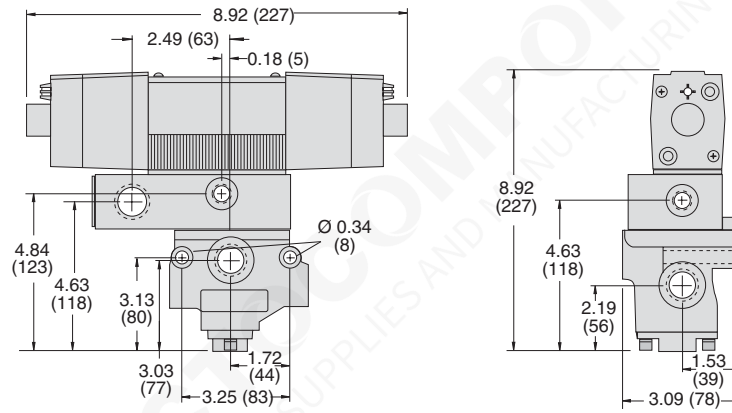

Body Size 1-1/4

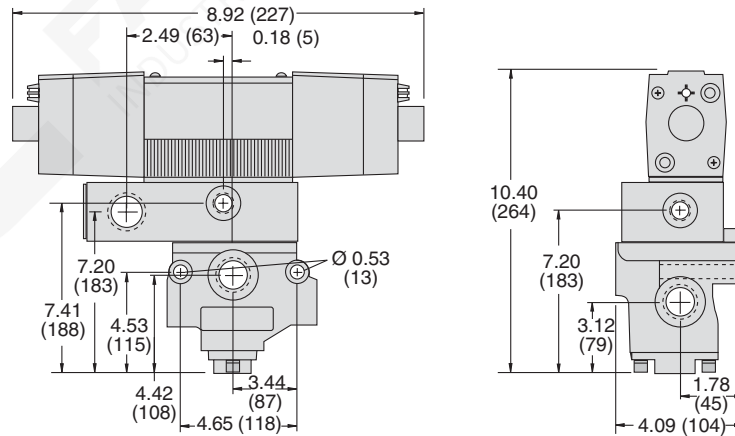

Downloadable CAD models available.

# Ordering Information

## 4/2 Direct Double Solenoid Pilot Controlled Valves

### MODEL NUMBER CONFIGURATOR

### 4-Way 2-Position Valves

Port Thread		27	7	6	B	2003	W
NPT							
Leave Blank							
G	D						
Series							
Actuation							
Direct Solenoid Controlled							
Valve Function							
4/2							
Revision Level							

Current	Voltage*	
DC	24 V	W
AC	110-120 V, 50/60 Hz	Z
	230-250 V, 60 Hz	Y

\* For other voltages consult ROSS.

Body Size	Port Size		Internal Pilot Supply*
	In-Out	Exhaust	
3/8	1/4	1/2	2003
	3/8	1/2	3003
	1/2	1/2	4013
3/4	1/2	1	4003
	3/4	1	5003
	1	1	6013
1-1/4	1	1-1/2	6003
	1-1/4	1-1/2	7003
	1-1/2	1-1/2	8013



\* For models with external pilot supply consult ROSS.

Model Number examples: 2776B2003W, D2776B8003Z.

Size			Flow C <sub>v</sub> (NI/min)		Average Response Constants*			≈ Weight lb (kg)
Body	Port 1, 2, 4	Port 3			M	F		
			1-2, 1-4	4-3, 2-3		1-2, 1-4	4-3, 2-3	
3/8	1/4	1/2	2.1 (2100)	2.9 (2900)	10	0.92	0.92	3.0 (1.4)
	3/8	1/2	2.9 (2900)	4.2 (4100)	10	0.90	0.90	
	1/2	1/2	3.1 (3100)	4.3 (4200)	10	0.89	0.73	
3/4	1/2	1	5.6 (5500)	8.1 (8000)	26	0.50	0.66	5.3 (2.4)
	3/4	1	7.0 (6900)	9.3 (9200)	26	0.36	0.55	
	1	1	7.8 (7700)	10 (9900)	26	0.35	0.50	
1-1/4	1	1-1/2	19 (19000)	26 (26000)	79	0.17	0.22	11.3 (5.1)
	1-1/4	1-1/2	21 (21000)	27 (27000)	79	0.16	0.18	
	1-1/2	1-1/2	22 (22000)	27 (27000)	79	0.15	0.15	

\* **Valve Response Time** – Response Time (msec) = M + (F • V). This is the average time required to fill a volume V (cubic inches) to 90% of supply pressure or to exhaust it to 10% of supply pressure. M and F values are shown above.

### Valve Schematic

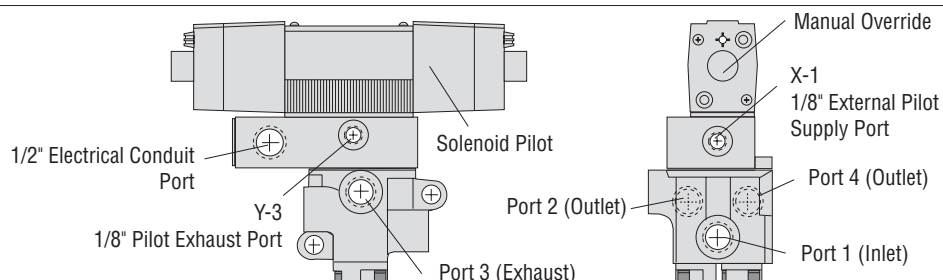




## 4/2 Direct Double Solenoid Pilot Controlled Valves


### DIMENSIONS

Inches (mm)


Body Size 3/8

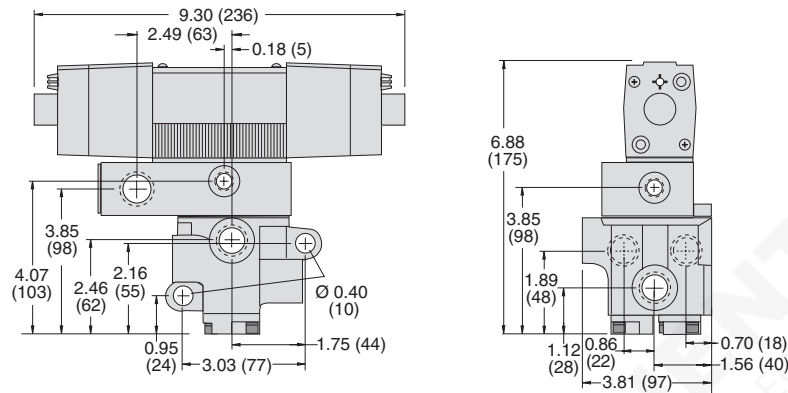

Body Size 3/4

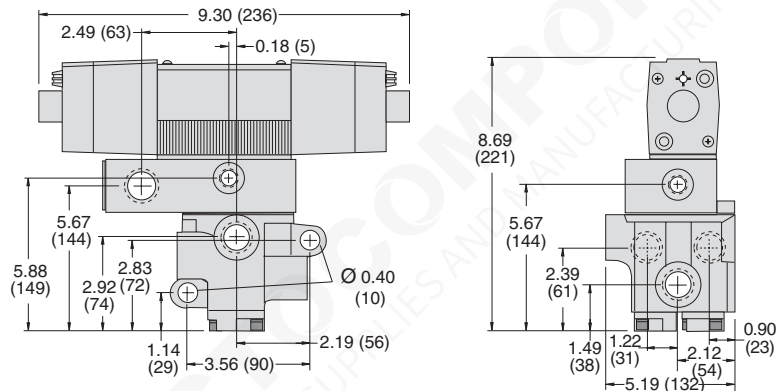

Body Size 1-1/4

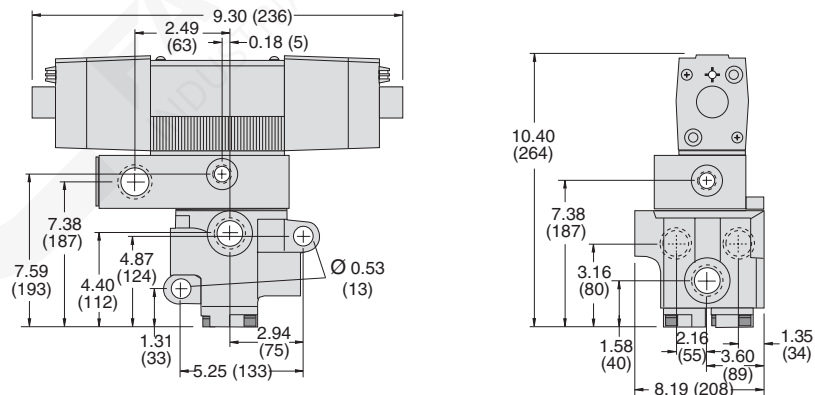

Downloadable CAD models available.

# Ordering Information

## 2/2 Pressure Controlled Valves

### MODEL NUMBER CONFIGURATOR

### 2-Way 2-Position Valves

Port Thread		27	5	1	A	2001
NPT						
Leave Blank						
G	D					
Series						
Actuation						
Pressure Controlled						
Valve Function						
2/2 Normally Closed	1					
2/2 Normally Open	2					
Revision Level						

Body Size	Port Size	
	In-Out	
3/8	1/4	2001
	3/8	3001
	1/2	4011
3/4	1/2	4001
	3/4	5001
	1	6011
1-1/4	1	6001
	1-1/4	7001
	1-1/2	8011
2	1-1/2	8001
	2	9001
	2-1/2	9011

Model Number examples: 2751A2001, D2751A6001.

Size		Flow C <sub>v</sub> (NI/min)		Average Response Constants*			≈ Weight lb (kg)
Body	Port 1, 2	Normally Closed (NC)	Normally Open (NO)	M	F		
		1-2	1-2		NC	NO	
3/8	1/4	1.8 (1800)	1.8 (1800)	10	0.91	0.91	2.5 (1.2)
	3/8	3.2 (3100)	2.9 (2800)	10	0.70	0.76	
	1/2	3.9 (3800)	3.4 (3300)	10	0.64	0.72	
3/4	1/2	7.2 (7100)	6.5 (6400)	14	0.37	0.43	3.3 (1.5)
	3/4	9.1 (9000)	8.2 (8100)	14	0.34	0.39	
	1	9.9 (9700)	8.2 (8100)	14	0.34	0.37	
1-1/4	1	21 (21000)	21 (21000)	26	0.17	0.17	7.0 (3.2)
	1-1/4	30 (31000)	22 (22000)	26	0.15	0.19	
	1-1/2	32 (31000)	24 (24000)	26	0.15	0.18	
2	1-1/2	46 (45000)	46 (45000)	41	0.09	0.09	15.5 (6.9)
	2	59 (58000)	58 (57000)	41	0.07	0.07	
	2-1/2	66 (65000)	60 (59000)	41	0.07	0.06	

\* **Valve Response Time** – Response Time (msec) = M + (F • V). This is the average time required to fill a volume V (cubic inches) to 90% of supply pressure or to exhaust it to 10% of supply pressure. M and F values are shown above.

#### Valve Schematic

Normally Closed	Normally Open

1/4" Signal Port

Port 2 (Outlet)


Port 1 (Inlet)

## 2/2 Pressure Controlled Valves


### DIMENSIONS

Inches (mm)


Body Size 3/8

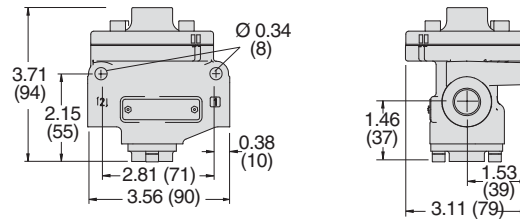


Body Size 3/4

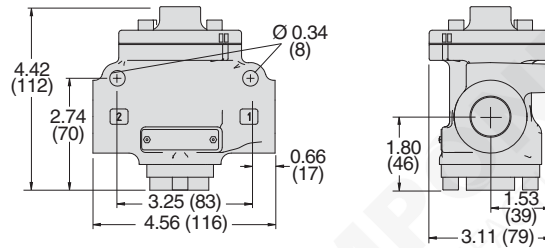

Body Size 1-1/4

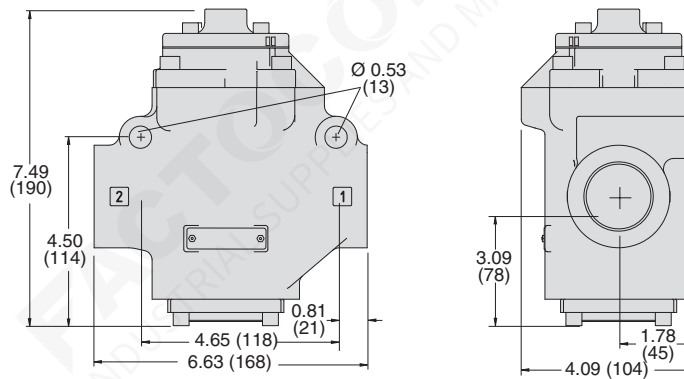

Body Size 2

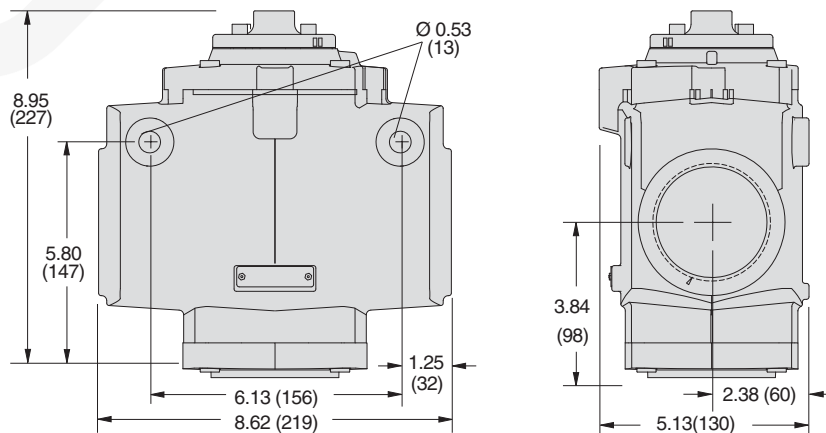

Downloadable CAD models available.

# Ordering Information

## 3/2 Pressure Controlled Valves

### MODEL NUMBER CONFIGURATOR

### 3-Way 2-Position Valves

Port Thread		27	5	3	A	2001
NPT						
Leave Blank						
G	D					
Series						
Actuation						
Pressure Controlled						
Valve Function						
3/2 Normally Closed	3					
3/2 Normally Open	4					
Revision Level						

Body Size	Port Size		
	In-Out	Exhaust	
3/8	1/4	1/2	2001
	3/8	1/2	3001
	1/2	1/2	4011
3/4	1/2	1	4001
	3/4	1	5001
	1	1	6011
1-1/4	1	1-1/2	6001
	1-1/4	1-1/2	7001
	1-1/2	1-1/2	8011
2	1-1/2	2-1/2	8001
	2	2-1/2	9001
	2-1/2	2-1/2	9011

Model Number examples: 2753A2001, D2753A6001.

Size			Flow C <sub>v</sub> (NI/min)				Average Response Constants*				≈ Weight lb (kg)	
Body	Port 1, 2	Port 3	Normally Closed (NC)		Normally Open (NO)		M	F				
								NC		NO		
			1-2	2-3	1-2	2-3		1-2	2-3	1-2		2-3
3/8	1/4	1/2	1.9 (1900)	3.3 (3200)	1.7 (1700)	3.0 (3000)	10	0.90	0.80	0.99	0.88	1.3 (0.6)
	3/8	1/2	2.9 (2800)	4.4 (4300)	2.8 (2800)	3.0 (3000)	10	0.70	0.50	0.90	0.77	
	1/2	1/2	3.8 (3800)	5.0 (4900)	3.0 (3000)	3.0 (3000)	10	0.75	0.50	0.90	0.76	
3/4	1/2	1	6.2 (6100)	9.4 (9300)	6.1 (6000)	8.0 (7900)	12	0.43	0.17	0.46	0.60	2.0 (0.9)
	3/4	1	8.2 (8100)	10 (9800)	7.7 (7600)	8.0 (7900)	12	0.36	0.26	0.45	0.60	
	1	1	9.1 (9000)	12 (12000)	8.3 (8200)	8.0 (7900)	12	0.34	0.25	0.40	0.59	
1-1/4	1	1-1/2	21 (21000)	27 (27000)	18 (18000)	20 (20000)	32	0.17	0.14	0.20	0.17	6.0 (2.7)
	1-1/4	1-1/2	29 (29000)	29 (29000)	21 (21000)	22 (22000)	32	0.15	0.15	0.19	0.17	
	1-1/2	1-1/2	30 (30000)	30 (30000)	21 (21000)	25 (25000)	32	0.15	0.15	0.19	0.16	
2	1-1/2	2-1/2	45 (44000)	75 (74000)	45 (44000)	53 (52000)	76	0.05	0.04	0.07	0.04	15.3 (6.9)
	2	2-1/2	57 (56000)	78 (77000)	55 (54000)	61 (60000)	76	0.05	0.04	0.05	0.04	
	2-1/2	2-1/2	66 (65000)	82 (81000)	61 (60000)	71 (70000)	76	0.05	0.04	0.05	0.04	

\* Valve Response Time — Response Time (msec) = M + (F • V). This is the average time required to fill a volume V (cubic inches) to 90% of supply pressure or to exhaust it to 10% of supply pressure. M and F values are shown above.

#### Valve Schematic

Normally Closed	Normally Open

1/4" Signal Port

Port 3 (Exhaust)

Port 2 (Outlet)


Port 1 (Inlet)

## 3/2 Pressure Controlled Valves


### DIMENSIONS

Inches (mm)


Body Size 3/8

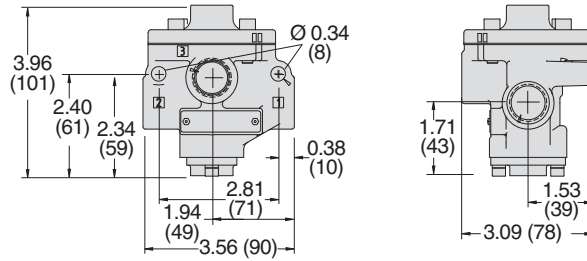


Body Size 3/4

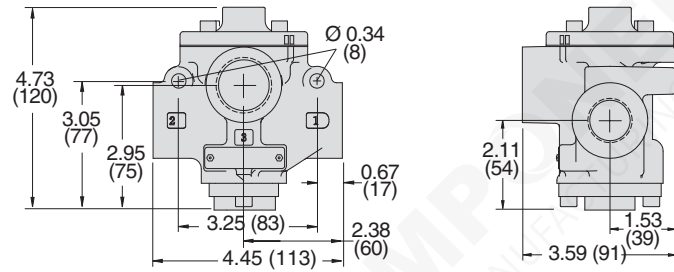

Body Size 1-1/4

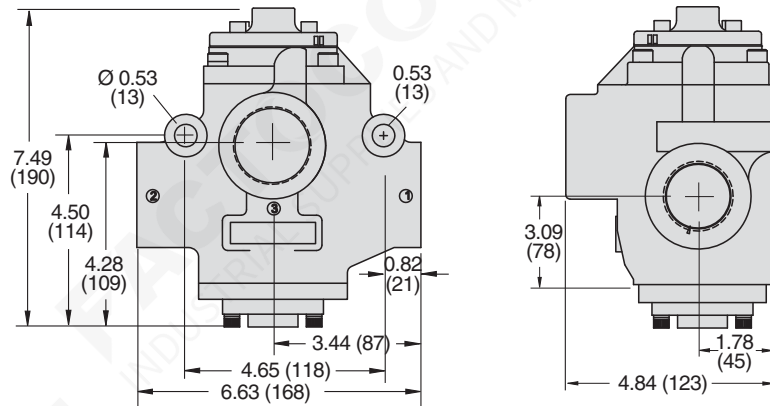

Body Size 2

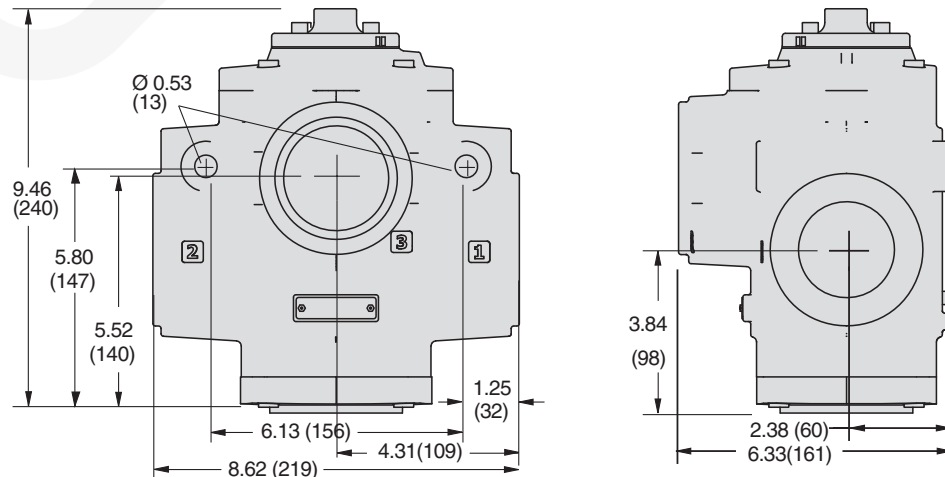

Downloadable CAD models available.

# Ordering Information

## 4/2 Pressure Controlled Valves

### MODEL NUMBER CONFIGURATOR

### 4-Way 2-Position Valves

Port Thread		27	5	6	A	2001
NPT						
Leave Blank						
G	D					
Series						
Actuation						
Pressure Controlled						
Valve Function						
4/2						
Revision Level						



Body Size	Port Size		
	In-Out	Exhaust	
3/8	1/4	1/2	2001
	3/8	1/2	3001
	1/2	1/2	4011
3/4	1/2	1	4001
	3/4	1	5001
	1	1	6011
1-1/4	1	1-1/2	6001
	1-1/4	1-1/2	7001
	1-1/2	1-1/2	8011

Model Number examples: 2756A2001, D2756A2001.

Size			Flow C <sub>v</sub> (NI/min)		Average Response Constants*			≈ Weight lb (kg)
Body	Port 1, 2, 4	Port 3			M	F		
			1-2, 1-4	4-3, 2-3		1-2, 1-4	4-3, 2-3	
3/8	1/4	1/2	2.1 (2100)	2.9 (2900)	10	0.92	0.92	1.8 (0.8)
	3/8	1/2	2.9 (2900)	4.2 (4100)	10	0.90	0.90	
	1/2	1/2	3.1 (3100)	4.3 (4200)	10	0.89	0.73	
3/4	1/2	1	5.6 (5500)	8.1 (8000)	26	0.50	0.66	4.3 (1.9)
	3/4	1	7.0 (6900)	9.3 (9200)	26	0.36	0.55	
	1	1	7.8 (7700)	10 (9800)	26	0.35	0.50	
1-1/4	1	1-1/2	19 (19000)	26 (26000)	79	0.22	0.22	10.3 (4.6)
	1-1/4	1-1/2	21 (21000)	27 (27000)	79	0.18	0.18	
	1-1/2	1-1/2	22 (22000)	27 (27000)	79	0.15	0.15	

\* **Valve Response Time** – Response Time (msec) = M + (F • V). This is the average time required to fill a volume V (cubic inches) to 90% of supply pressure or to exhaust it to 10% of supply pressure. M and F values are shown above.

### Valve Schematic

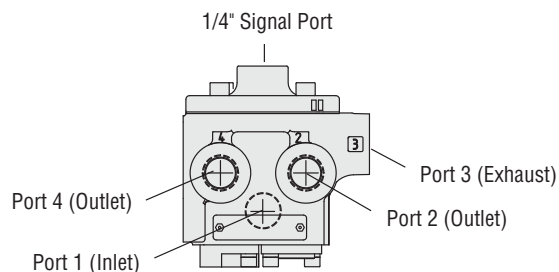


## 4/2 Pressure Controlled Valves


### DIMENSIONS

Inches (mm)


Body Size 3/8

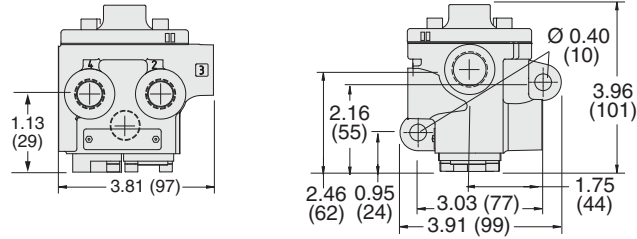

Body Size 3/4

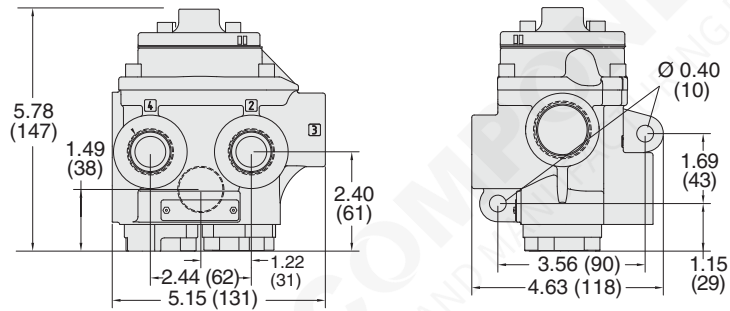

Body Size 1-1/4

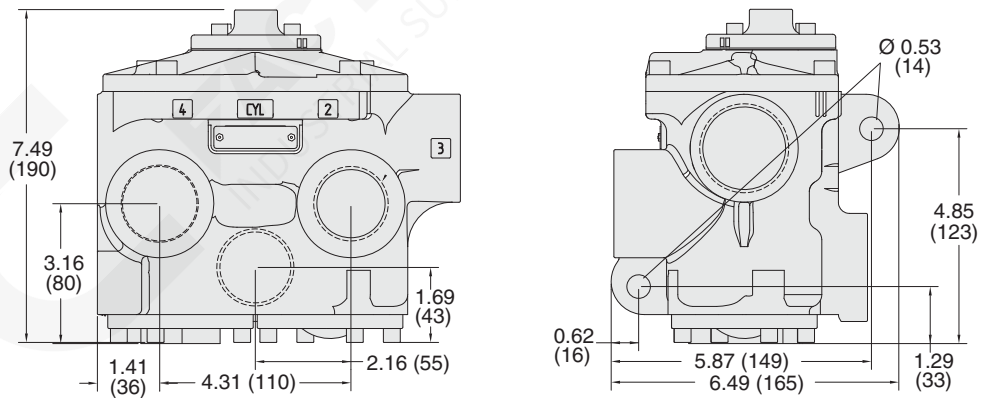


Downloadable CAD models available.


## EXHAUST SILENCERS



Illustration example.

Silencers	SPECIFICATIONS		Silencer Material		Pressure Range psig (bar)		Schematic	
			Aluminum		0-290 (0-20) maximum			
	Port Size	Thread Type	Flow C <sub>v</sub> (NI/min)	Model Number		Dimensions inches (mm)		≈ Weight lb (kg)
				NPT Thread	R/Rp Thread	Length	Hex Size (D)	
	1/2	Male	6.8 (6700)	5500A4003	D5500A4003	3.6 (9)	1.25 (32)	0.2 (0.1)
	1	Male	18 (18000)	5500A6003	D5500A6003	5.4 (14)	2.0 (51)	0.9 (0.4)
	1-1/2	Female	39 (38000)	5500A8001	D5500A8001	5.7 (14)	2.5 (64)	1.3 (0.6)
	2-1/2	Female	104 (100000)	5500A9002	D5500A9002	4.0 (102)	5.7 (145)	2.9 (1.4)

## FEMALE SILENCER CONNECTORS

Hex Nipples	Material	Fitting Pipe Size	Thread Type	Model Number		
				NPT Thread	BSPT Thread	
	Steel	1-1/2	Male - Male	488J27	122J39	
		2-1/2	Male - Male	490J27	123J39	



## SOLENOID PILOT INDICATOR LIGHT KITS




Illustration example.

Indicator Light Kits	Kit Number		
	24 V DC	110-120 V AC, 50-60 Hz	230 V AC, 50-60 Hz
	862K87-W	862K87-Z	862K87-Y
	To visually verify valve operation, indicator light kits are available for single solenoid models. Indicator lights are standard on double solenoid valves. The indicator light is illuminated when the solenoid is energized.		

## SOLENOID PILOT MANUAL OVERRIDE KITS

Flush Button	Extended Button	Extended Button with Palm
		

Illustration examples.

Manual Override Kits	Manual Override Type	Kit Number	
		Locking Type	Non-Locking Type
	Flush Button	792K87	—
	Extended Button	—	791K87
	Extended Button with Palm	—	984H87
<p>Flush rubber button, non-locking manual override is standard on single solenoid models.</p> <p>Flush metal-button, non-locking manual overrides are standard on direct double solenoid models.</p> <p>Each of the buttons in the override kits is made of metal and is spring-returned. The locking type button, however, can be kept in the actuated position by turning the slot in the top of the button with a screwdriver.</p>			



# CAUTIONS, WARNINGS And STANDARD WARRANTY



ROSS OPERATING VALVE, ROSS CONTROLS®, ROSS DECCO®, and AUTOMATIC VALVE INDUSTRIAL, collectively the “ROSS Global Family”.

## PRE-INSTALLATION or SERVICE

1. Before servicing a valve or other pneumatic component, be sure all sources of energy are turned off, the entire pneumatic system is shut down and exhausted, and all power sources are locked out (ref: OSHA 1910.147, EN 1037).
2. All ROSS Global Family Products, including service kits and parts, should be installed and/or serviced only by persons having training and experience with pneumatic equipment. Because any product can be tampered with and/or need servicing after installation, persons responsible for the safety of others or the care of equipment must check ROSS Global Family Products on a regular basis and perform all necessary maintenance to ensure safe operating conditions.
3. All applicable instructions should be read and complied with before using any fluid power system to prevent harm to persons or equipment. In addition, overhauled or serviced valves must be functionally tested prior to installation and use. If you have any questions, call your nearest ROSS Global Family location.
4. Each ROSS Global Family Product should be used within its specification limits. In addition, use only ROSS Group components to repair ROSS Global Family Products.

### WARNINGS:

**Failure to follow these instructions can result in personal injury and/or property damage.**

## FILTRATION and LUBRICATION

1. Dirt, scale, moisture, etc., are present in virtually every air system. Although some valves are more tolerant of these contaminants than others, best performance will be realized if a filter is installed to clean the air supply, thus preventing contaminants from interfering with the proper performance of the equipment. The ROSS Global Family recommends a filter with a 5-micron rating for normal applications.
2. All standard ROSS Global Family filters and lubricators with polycarbonate plastic bowls are designed for compressed air applications only. Use the metal bowl guard, where provided, to minimize danger from high pressure fragmentation in the event of bowl failure. Do not expose these products to certain fluids, such as alcohol or liquefied petroleum gas, as they can cause bowls to rupture, creating a combustible condition and hazardous leakage. Immediately replace crazed, cracked, or deteriorated bowls.
3. Only use lubricants which are compatible with materials used in the valves and other components in the system. Normally, compatible lubricants are petroleum base oils with oxidation inhibitors, an aniline point between 180°F (82°C) and 220°F (104°C), and an ISO 32, or lighter, viscosity. Avoid oils with

phosphate type additives which can harm polyurethane components, potentially leading to valve failure which risks personal injury, and/or damage to property.

### WARNINGS:

**Failure to follow these instructions can result in personal injury and/or property damage.**

## AVOID INTAKE/EXHAUST RESTRICTION

1. Do not restrict air flow in the supply line. To do so could reduce the pressure of the supply air below minimum requirements for the valve and thereby causing erratic action.
2. Do not restrict a valve's exhaust port as this can adversely affect its operation. Exhaust silencers must be resistant to clogging and must have flow capacities at least as great as the exhaust capacities of the valves. Contamination of the silencer can result in reduced flow and increased back pressure.

### WARNINGS:

**Failure to follow these instructions can result in personal injury and/or property damage.**

## SAFETY APPLICATIONS

1. Mechanical Power Presses and other potentially hazardous machinery using a pneumatically controlled clutch and brake mechanism must use a press control double valve with a monitoring device. A double valve without a self-contained monitoring device should be used only in conjunction with a control system which assures monitoring of the valve. All double valve installations involving hazardous applications should incorporate a monitoring system which inhibits further operation of the valve and machine in the event of a failure within the valve mechanism.
2. Safe Exhaust (dump) valves without a self-contained monitoring device should be used only in conjunction with a control system which assures monitoring of the valve. All Safe Exhaust valve installations should incorporate a monitoring system which inhibits further operation of the valve and machine in the event of a failure within the valve mechanism.
3. Per specifications and regulations, the ROSS L-O-X® and L-O-X® with EEZ-ON®, N06 and N16 Series operation products are defined as energy isolation devices, NOT AS EMERGENCY STOP DEVICES.

**WARNINGS: Failure to follow these instructions can result in personal injury and/or property damage.**

## STANDARD WARRANTY

All products sold by the ROSS Global Family are warranted for a one-year period [with the exception of Filters, Regulators and Lubricators (“FRLs”) which are warranted for a period of seven (7) years] from the date of purchase. All products are, during their respective warranty periods, warranted to be free of defects in material and workmanship. The ROSS Global Family's obligation under this warranty is limited to repair, replacement or refund of the purchase price paid for products which the ROSS Global Family has determined, in its sole discretion, are defective. All warranties become void if a product has been subject to misuse, misapplication, improper maintenance, modification or tampering. Products for which warranty protection is sought must be returned to the ROSS Global Family freight prepaid.

THE WARRANTY EXPRESSED ABOVE IS IN LIEU OF AND EXCLUSIVE OF ALL OTHER WARRANTIES AND THE ROSS GLOBAL FAMILY EXPRESSLY DISCLAIMS ALL OTHER WARRANTIES EITHER EXPRESSED OR IMPLIED WITH RESPECT TO MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. THE ROSS GLOBAL FAMILY MAKES NO WARRANTY WITH RESPECT TO ITS PRODUCTS MEETING THE PROVISIONS OF ANY GOVERNMENTAL OCCUPATIONAL SAFETY AND/OR HEALTH LAWS OR REGULATIONS. IN NO EVENT IS THE ROSS GLOBAL FAMILY LIABLE TO PURCHASER, USER, THEIR EMPLOYEES OR OTHERS FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES WHICH MAY RESULT FROM A BREACH OF THE WARRANTY DESCRIBED ABOVE OR THE USE OR MISUSE OF THE PRODUCTS. NO STATEMENT OF ANY REPRESENTATIVE OR EMPLOYEE OF THE ROSS GLOBAL FAMILY MAY EXTEND THE LIABILITY OF THE ROSS GLOBAL FAMILY AS SET FORTH HEREIN.